

Wm. G. W. Co.
10017 E. W. H. H. H. H.
394-2010

SPECIFICATION REFERENCE BOOK



NuTone

HOOD-FANS

DOOR CHIMES

EXHAUST FANS

FOOD CENTER

INTERCOM-RADIO

BUILT-IN STEREO

ELECTRIC HEATERS

BUILT-IN BARBECUE



Reference Charts For

ARCHITECTS
BUILDERS
CONTRACTORS

This book is designed for quick reference to technical information about NuTone products. You will find it especially useful in both the planning and the installation stages for NuTone Electrical Built-Ins in new homes, as well as in the remodeling of existing homes.

We appreciate your use of NuTone products and hope you will always specify them. Remember: When you specify NuTone, you are assured of trouble-free performance . . . backed by our exclusive SERVICE WARRANTY BOND . . . the only one of its kind in the entire Industry!

VENTILATION

	Page
6000 Series — Fold-Away Hoods	4-5
3000 Series — Select-A-Matic Hoods	6-7
3400 Series — Non Ducted Hood-Fans	8-9
5000 Series — Heavy Duty Hood-Fans	10-11
1100N Series— Jet-Flo Hood-Fans	12-13
1500N Series— Twin Hood-Fans	14-15
3200 Series — Oven Hood-Fans	16-17
8000 Series — 8" Pull Chain Wall Fans	18-19
8110 Series — 10" Pull Chain Wall Fans	20-21
8060 Series — 8" Automatic Wall Fans	22-23
8170 Series — 10" Automatic Wall Fans	24-25
Model 8310 — 8" Ceiling or Wall Fan	26-27
Model 8510 — 10" Ceiling or Wall Fan	28-29
8200 Series — Jet-Flo Vertical Discharge Wall Fans	30-31
Model 8220 — 8" Vertical Discharge Fan	32-33
Model 8490 — 10" Vertical Discharge Fan	34-35
8700 Series — Twin-Blower Exhaust Fan	36-37
Model 8830 — Wall or Ceiling Bathroom Fan	38-39
Model 8810 — Ceiling Bathroom Fan	40-41
Model 8660 — Bathroom Fan and Light	42-43
Model 8140 — Room to Room Fan	44-45
Ventilation Accessories	46-49

MUSIC SYSTEMS

Built-In Stereo-Amplifier	50-51
Built-In Stereo-Tuner, Record Changer, Tape Recorder, Record Storage Cabinet	52-53
Built-In Stereo-Speakers, Wall Speakers	54-55
Built-In AM-FM Intercom-Radio Systems—Models 2057 and 2058	56-57
Built-In AM Intercom-Radio Systems—Models 2053 and 2054	58-59

APPLIANCES

Built-In Electric Barbecue and Rotisserie—Models 4000 and 4020	60-61
Built-In Charcoal Barbecue — Model 4010	62-63
Built-In Food Center	64-65

ELECTRIC HEATERS



Models 9090, 9110 — Heat-A-Vent Lite	66-67
Model 9010 — Heat-A-Lite	68-69
Model 9150 — Ceiling Heater and Exhaust Fan	70-71
Model 9200 — Radiant Ceiling Heater	72-73
Model 9285 — Radiant Ceiling Heater	74-75
Model 9290 — Radiant Ceiling Heater	76-77
Model 9400 — Radiant Ceiling Heater	78-79
Models 9300 and 9310 — Wall Heater and Exhaust Fan	80-81
Model 9352 Series — Radiant Wall Heater	82-83

DOOR CHIMES

Door Chimes—Surface Mounted	84-87
Built-In Clocks and Clock Chimes, Built-In Door Chimes, Electronic Door Chimes	88-89
Long Tube and Mechanical Door Chimes	90-91
Pushbuttons	92-93
Transformers	94-95



6000 Series Fold-Away Hoods and Fans

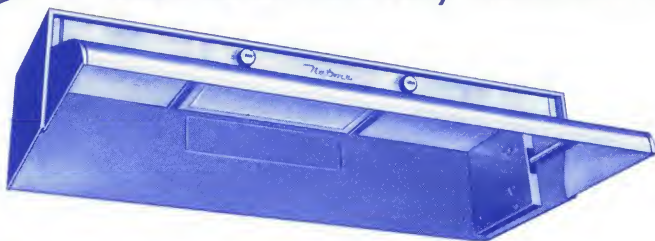

MODEL 3081
STANDARD
POWER UNIT



MODEL 3091
DELUXE TWIN BLOWER
POWER UNIT


Hoods Only: This model has blank area on front — ready for inserting panel of your choice. Combine the Hood with choice of Power Units listed below to make one complete Hood-Fan. "Fold-Away" mechanism factory installed. Transition duct (4" x 12" to 3¼" x 10") included.				Splash Plates 22" high		
Size	Model	Finish	List	Model	List	
24"	6005	Silver Anodized Aluminum	45.95	SP-1705	11.95	
	6006	Copper Anodized Aluminum	45.95	SP-1706	11.95	
30"	6015	Silver Anodized Aluminum	47.95	SP-1715	13.75	
	6016	Copper Anodized Aluminum	47.95	SP-1716	13.75	
36"	6025	Silver Anodized Aluminum	49.95	SP-1725	15.95	
	6026	Copper Anodized Aluminum	49.95	SP-1726	15.95	
42"	6035	Silver Anodized Aluminum	51.95	SP-1735	18.25	
	6036	Copper Anodized Aluminum	51.95	SP-1736	18.25	
Power Units Only: Combine with Hoods listed above to make one complete Hood-Fan. Includes Fan, Fan Housing, Light and Fan Dials and Light Assembly and Filter (does not include light bulbs).				H.V.T. Performance Rating		
Size	Model	Finish	Horiz'tal	Vertical	List	
Standard	3081	Copper Enamel Finish — Use with Copper Anodized Aluminum Hoods	180	160	35.95	
	3082	Aluminum Enamel Finish — Use with Silver Anodized Aluminum Hoods			35.95	
DeLuxe Twin Blower	3091	Copper Enamel Finish — Use with Copper Anodized Aluminum Hoods	250	250	56.95	
	3092	Aluminum Enamel Finish — Use with Silver Anodized Aluminum Hoods			56.95	
Insert Panels: Hood front can match cabinets or appliances by using removable insert panels. Available in 11 colors — for use with 6005-6036 "Fold-Away" Hoods.						
Finish		24"	30"	36"	42"	List
White Enamel		60000	60100	60200	60300	2.50
Copper Enamel		60001	60101	60201	60301	2.50
Antique Copper Enamel		60003	60103	60203	60303	3.50
Silver Anodized Alum.		60005	60105	60205	60305	3.95
Copper Anodized Alum.		60006	60106	60206	60306	3.95
Stainless Steel		60008	60108	60208	60308	5.95
Turquoise Enamel		60085	60185	60285	60385	2.50
Pink Enamel		60086	60186	60286	60386	2.50
Yellow Enamel		60087	60187	60287	60387	2.50
Brown Enamel		60088	60188	60288	60388	2.50
Colonial Copper Enamel		60089	60189	60289	60389	3.50
Light Kit Assembly: For use with 6000 Series Hoods listed above when used with NuTone Wall Fans. Includes Light Housing Assembly and "on-off" dials for light and fan. (Light bulbs not included).						
Model 6071 Copper Enamel		Model 6072 Aluminum Enamel			9.25	

6000 Series Fold-Away Hood and Fan




- Choice of 2 Anodized hood finishes and 11 insert panels.
- Distinctive styling. Control panel has smart "appliance look."
- Rotary Controls for light and multiple speed fan.
- Choice of Standard or Deluxe Twin Blower Power Units.
- Recessed, non-glare lighting illuminates entire range.
- Hood is $19\frac{1}{4}$ " deep — reaches from wall to front burners.
- Power Unit installs inside of hood — uses no cabinet space.
- "Super-suction" fans whisk away odors, grease, steam, smoke.
- Prewired "plug-in" Power Units . . . save installation time.
- Choice of Horizontal or Vertical discharge.
- Matching Splash Plates for every hood size and finish.

Exact size of a Hood is $\frac{1}{16}$ " less than given size. Example: A 36" Hood measures $35\frac{15}{16}$ ".

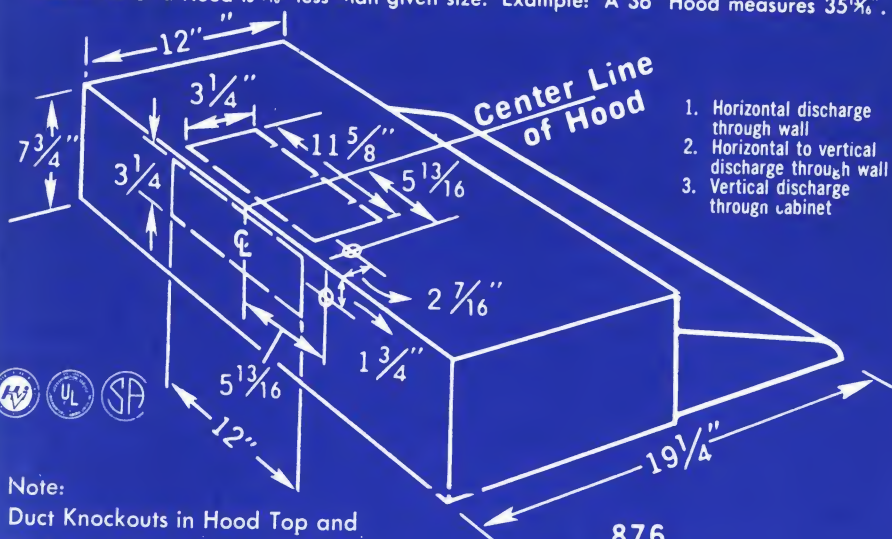

Note:


Duct Knockouts in Hood Top and Back are off-center $\frac{5}{8}$ " to the right. Check installation sheet for proper location of wall and cabinet cutouts.

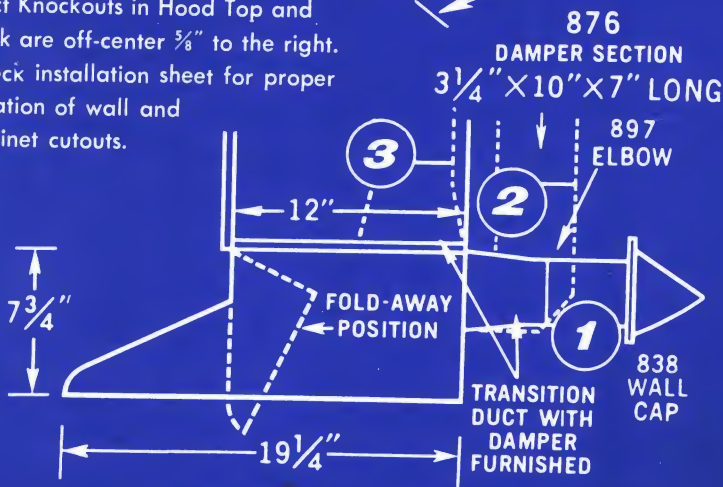

See pages 46 thru 49 for Ventilation Accessories




3000 Series Select-A-Matic Hoods and Fans

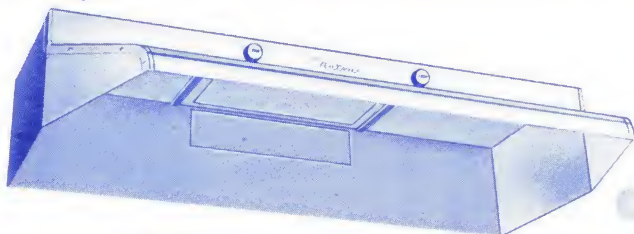

MODEL 3091
DELUXE TWIN BLOWER
POWER UNIT



MODEL 3081
STANDARD
POWER UNIT




MODEL 3061
DELUXE POWER UNIT

Hoods Only: Combine with Power Units listed below to make complete Hood-Fan. Transition Duct Included.				Splash Plates 22" high	
Size	Model	Finish	List	Model	List
30"	3010	White Enamel	19.75	SP-1710	5.50
	3011	Copper Enamel	19.75	SP-1711	5.50
	3015	Silver Anodized Aluminum	35.25	SP-1715	13.75
	3016	Copper Anodized Aluminum	35.25	SP-1716	13.75
	3018	Stainless Steel	44.75	SP-1718	20.25
	30189	Colonial Copper Enamel	21.75	SP-17189	6.50
36"	3020	White Enamel	21.75	SP-1720	5.95
	3021	Copper Enamel	21.75	SP-1721	5.95
	3025	Silver Anodized Aluminum	37.50	SP-1725	15.95
	3026	Copper Anodized Aluminum	37.50	SP-1726	15.95
	3028	Stainless Steel	49.95	SP-1728	24.75
	30289	Colonial Copper Enamel	23.95	SP-17289	6.95
42"	3030	White Enamel	23.95	SP-1730	6.50
	3031	Copper Enamel	23.95	SP-1731	6.50
	3035	Silver Anodized Aluminum	39.50	SP-1735	18.25
	3036	Copper Anodized Aluminum	39.50	SP-1736	18.25
	3038	Stainless Steel	55.25	SP-1738	27.75
	30389	Colonial Copper Enamel	25.95	SP-17389	7.50
48"	3040	White Enamel	27.95	SP-1740	7.75
	3041	Copper Enamel	27.95	SP-1741	7.75
	3045	Silver Anodized Aluminum	42.50	SP-1745	20.95
	3046	Copper Anodized Aluminum	42.50	SP-1746	20.95
	3048	Stainless Steel	61.25	SP-1748	32.95
	30489	Colonial Copper Enamel	29.95	SP-17489	8.75
Power Units Only: For use with Hoods listed above to make one complete Hood-Fan. Includes Fan, Light Assembly, Dials for Lights and Fan.			H.V.I. Performance Rating		List Price
Model	Size	Finish	Horiz'tal	Vertical	
3061 3062	DeLuxe	Copper Enamel Aluminum Enamel	300	225	51.95
3081 3082	Standard	Copper Enamel Aluminum Enamel	180	160	35.95
3091 3092	DeLuxe Twin Blower	Copper Enamel Aluminum Enamel	250	250	56.95
Scalloped Trim Strips — Copper RIBBED Anodized ONLY.					
30" 3076-30		36" 3076-36	42" 3076-42	48" 3076-48	5.50
Light Kit Assembly: For use above Hoods when used with NuTone Wall Fans. Includes light Housing Assembly, "on-off" dials for light and fan. (Light bulbs not included.)					
Model 6071 Copper Enamel			Model 6072 Aluminum Enamel		9.25

3000 Series Select-A-Matic Hood and Fan




- Choice of 6 beautiful colors and finishes.
- Basic Models can be made up into over 140 Hood-Fan combinations.
- Distinctive styling. Control panel has "appliance look."
- Interchangeable Power Units . . . or use with wall fans.
- Prewired "plug-in" power units. Saves time.
- "Super-suction" fans whisk away odors, grease, steam!
- Recessed, non-glare dual lighting for entire range
- Hood, 21" deep reaches from wall to front burners.
- Concealed power unit is inside hood.
- Matching Splash Plates for every hood size and finish.
- Scallop trim in Ribbed Copper Anodized only.

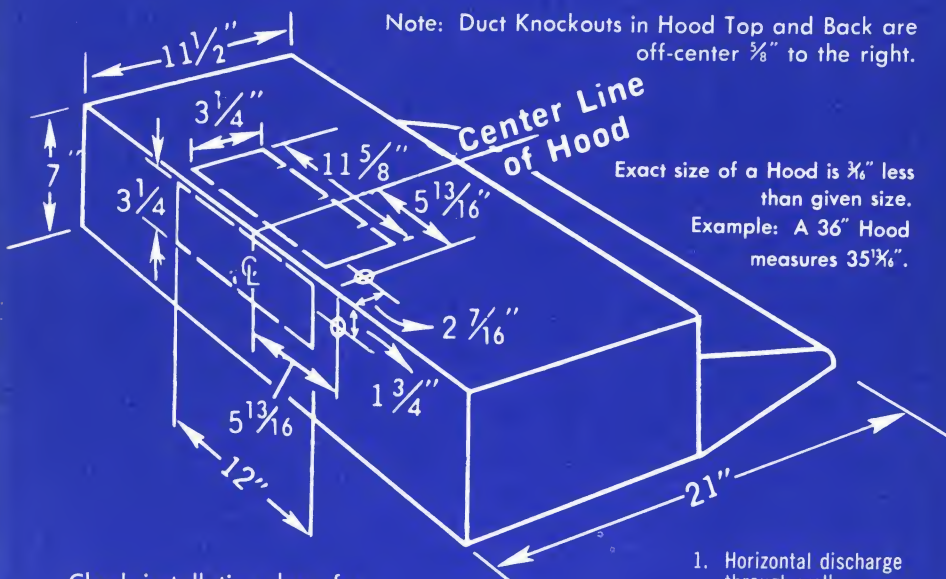


Check installation sheet for proper location of wall and cabinet cutouts.

1. Horizontal discharge through wall
2. Horizontal to vertical discharge through wall
3. Vertical discharge through cabinet

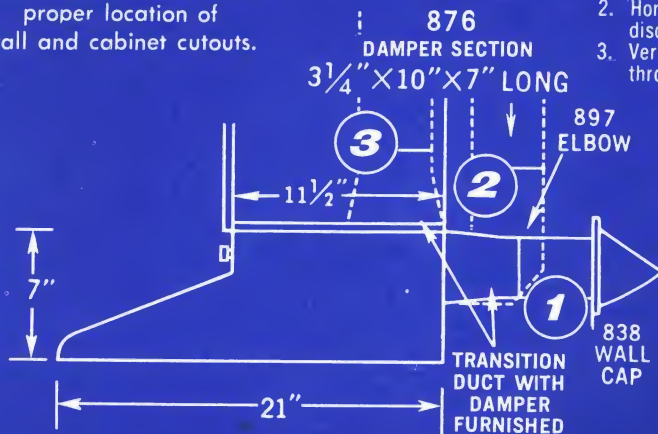



3400 Series Non-Ducted Hood-Fans

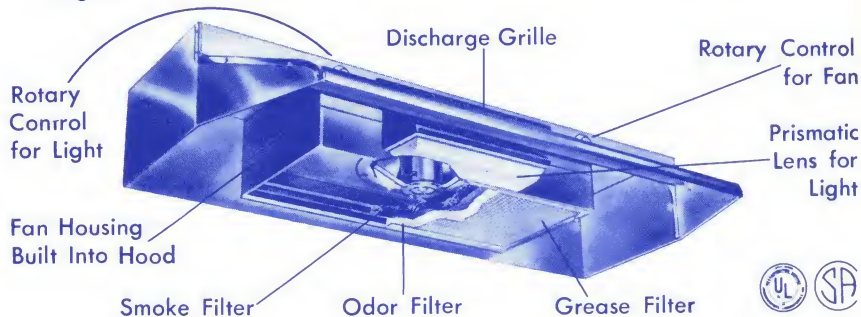


- No ducts needed — easy to attach to wall or cabinet.
- Hood, Motor and 3 Filter Elements come in one unit that installs over the range in a matter of minutes.
- Aluminum Mesh Grease Filter traps all grease.
- Fibre Glass Smoke Filter absorbs cooking smoke.
- Activated Charcoal Filter grabs cooking odors.
- Hood reaches all the way to the front burners.
- Impeller Type Fan Blade gives maximum performance at lowest noise level.
- Enclosed motor has 2 speeds for controlled ventilation.
- Wall Bracket available for attaching hood to wall where cabinet is not above range. ‡
- Matching Splash Plates for every hood size and finish.

24" Hoods are 18" deep, 6" high and full 24" wide.

‡ Model 859 Wall Mounting-Bracket Kit — List Price \$2.00

Size	Model	Finish	List	Splash Plates	
				Model	List
24"	3400	White Enamel	69.95	SP-1700	4.95
	3401	Copper Enamel	69.95	SP-1701	4.95
	3405	Silver Anodized Aluminum	75.95	SP-1705	11.95
	3406	Copper Anodized Aluminum	75.95	SP-1706	11.95
	3408	Stainless Steel	76.95	SP-1708	17.45
	34089	Colonial Copper Enamel	71.95	SP-17089	5.95
30"	3410	White Enamel	82.95	SP-1710	5.50
	3411	Copper Enamel	82.95	SP-1711	5.50
	3415	Silver Anodized Aluminum	97.95	SP-1715	13.75
	3416	Copper Anodized Aluminum	97.95	SP-1716	13.75
	3418	Stainless Steel	108.95	SP-1718	20.25
	34189	Colonial Copper Enamel	84.95	SP-17189	6.50
36"	3420	White Enamel	85.95	SP-1720	5.95
	3421	Copper Enamel	85.95	SP-1721	5.95
	3425	Silver Anodized Aluminum	100.95	SP-1725	15.95
	3426	Copper Anodized Aluminum	100.95	SP-1726	15.95
	3428	Stainless Steel	112.95	SP-1728	24.75
	34289	Colonial Copper Enamel	87.95	SP-17289	6.95
42"	3430	White Enamel	87.95	SP-1730	6.50
	3431	Copper Enamel	87.95	SP-1731	6.50
	3435	Silver Anodized Aluminum	102.95	SP-1735	18.25
	3436	Copper Anodized Aluminum	102.95	SP-1736	18.25
	3438	Stainless Steel	117.95	SP-1738	27.75
	34389	Colonial Copper Enamel	89.95	SP-17389	7.50

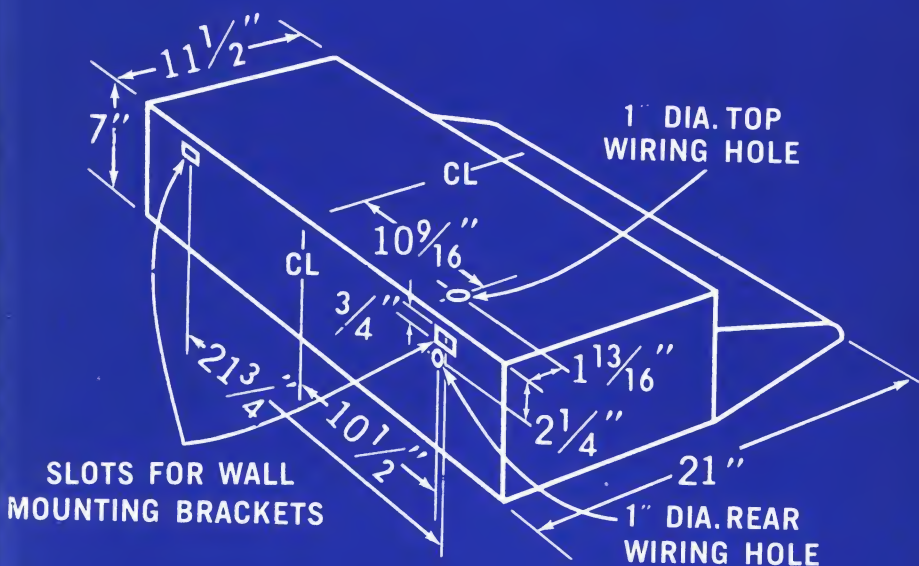


Exact size of a Hood is $\frac{1}{16}"$ less than given size.

24" Hoods are 18" deep, 6" high and full 24" wide.



5000 Series Heavy Duty Hood-Fans

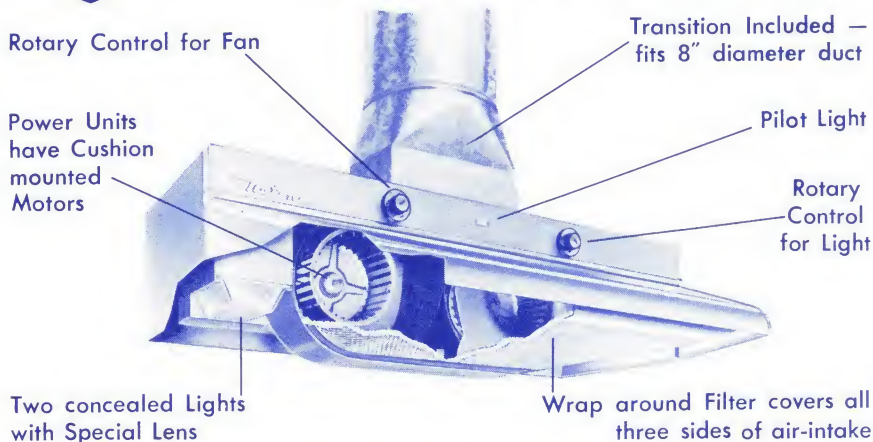


- For Gas and Electric Barbecue and Heavy Duty Ventilation.
- Offers highest effective air delivery of any dual power unit in the entire ventilation field.
- Super quiet — both power units are cushion mounted.
- 3 Position switch for fan — dial switch for light.
- Large 250 square inch aluminum grease filter.
- Transition duct included with hood fits 8" round duct.
- One piece fan housing installs inside of hood.
- Matching Splash Plates for every hood size and finish.
- Hood can be installed under cabinet or may be used with matching Canopy Kit.




Hoods Only: Includes Hood and Transition Duct to adapt to 8" round duct. Combine with Power Units listed below to complete Hood Fan.				Matching Canopy Kit 28½" high	
Size	Model	Finish	List	Model	List
30"	5016	Copper Anodized Aluminum	43.50	5066	29.95
	5018	Stainless Steel	52.95	5068	43.95
	50189	Colonial Copper Enamel	30.75	50689	22.95
	5026	Copper Anodized Aluminum	45.75	5076	31.50
36"	5028	Stainless Steel	58.25	5078	45.50
	50289	Colonial Copper Enamel	32.75	50789	24.50
	5036	Copper Anodized Aluminum	47.75	5086	32.95
42"	5038	Stainless Steel	63.50	5088	46.95
	50389	Colonial Copper Enamel	34.95	50889	25.95
	5046	Copper Anodized Aluminum	50.75	5096	34.50
48"	5048	Stainless Steel	69.50	5098	48.50
	50489	Colonial Copper Enamel	38.95	50989	27.50
	Power Units: With Hoods listed above makes complete Hood-Fan. Includes two Motors and two Blower Wheels, Filter, Fan and Light Switch.				H.V.I. Performance Rating
Model		Finish	List	over 450	
5001 5002		Copper Enamel Aluminum Enamel	83.00 83.00		
See 3000 Series Hood for Matching Splash Plates					


5000 Series Heavy Duty Hood-Fan

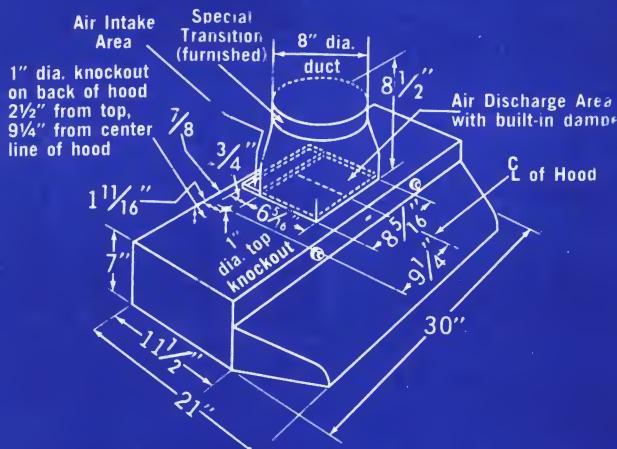

See pages 46 thru 49 for
Ventilation Accessories

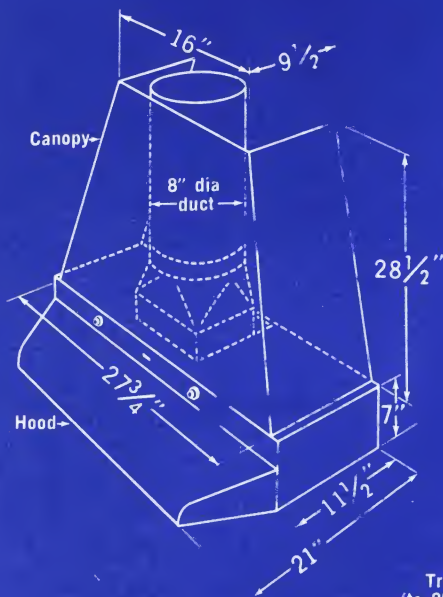


Exact size of a Hood is $\frac{3}{16}$ "
less than given size.
Example: A 36" Hood
measures 35 $\frac{13}{16}$ ".

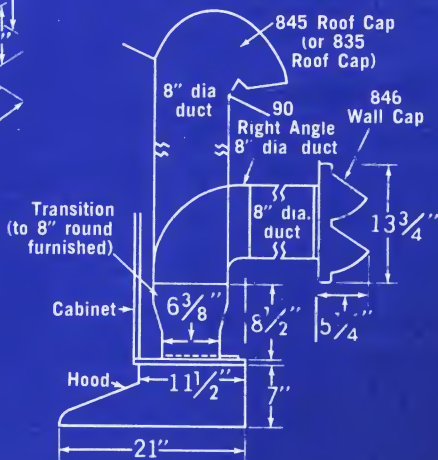



1100 N Series Jet-Flo Hood-Fans

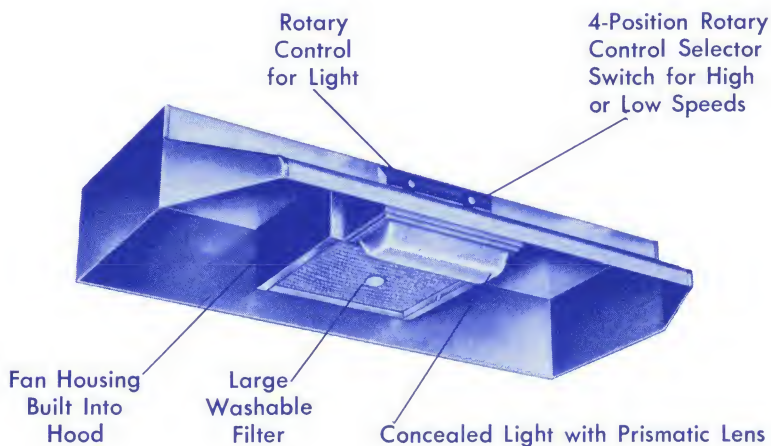

- Powerful Vertical Discharge Hood-Fan
- 4 position Selector Switch for correct Fan speed.
- Venturi ring Discharge Collar built in to top of hood.
- No reducer needed — fits standard 7" round duct.
- Fan housing built into hood.
- Weather sealed Damper section included.
- Large 99 square inch Aluminum Filter included.
- Enclosed light with Prismatic Lens lights entire range.
- Matching Splash Plates for every hood size and finish.


1100N Series Jet-Flo Hood-Fan						
Size	Model	Finish	List	H.V.I.Per- formance Rating	Splash Plates 22" high	
					Model	List
30"	1111N	Copper Enamel	44.95	250	SP-1711	5.50
	1116N	Copper Anodized Aluminum	54.95		SP-1716	13.75
	1118N	Stainless Steel	60.95		SP-1718	20.25
	11189N	Colonial Copper Enamel	46.95		SP-17189	6.50
36"	1121N	Copper Enamel	46.95	250	SP-1721	5.95
	1126N	Copper Anodized Aluminum	56.95		SP-1726	15.95
	1128N	Stainless Steel	62.95		SP-1728	24.75
	11289N	Colonial Copper Enamel	48.95		SP-17289	6.95
42"	1131N	Copper Enamel	48.95	250	SP-1731	6.50
	1136N	Copper Anodized Aluminum	58.95		SP-1736	18.25
	1138N	Stainless Steel	64.95		SP-1738	27.75
	11389N	Colonial Copper Enamel	50.95		SP-17389	7.50

1100 N Series Jet-Flo Hood-Fan




Exact size of a Hood is $\frac{3}{16}$ " less than given size.

Example: A 36" Hood measures $35\frac{13}{16}$ ".

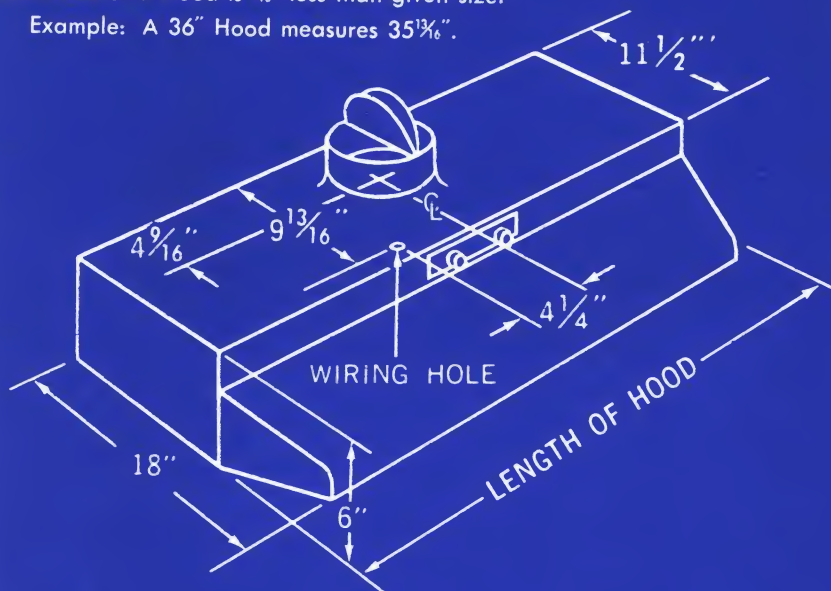

Typical Ducting Installation

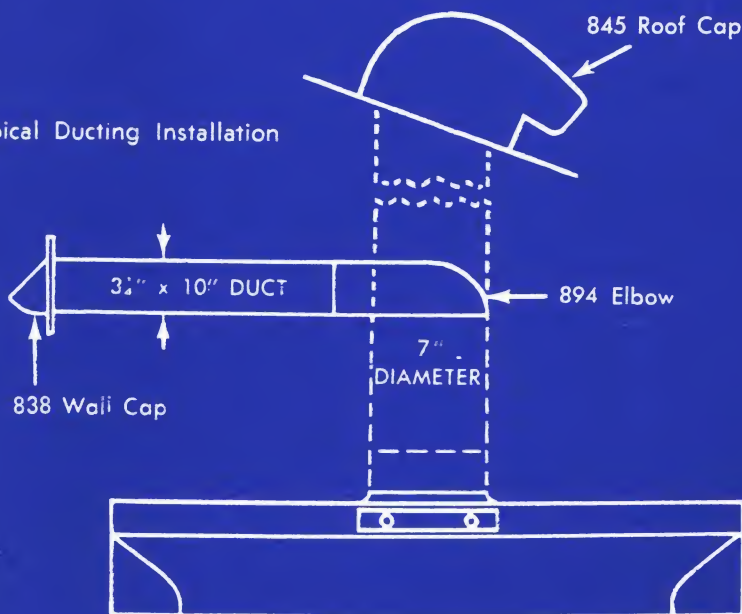




1500 N Series Twin Hood-Fans

4-Position Rotary
Control Selector
Switch for High
or Low Speeds

Rotary
Control
for Light

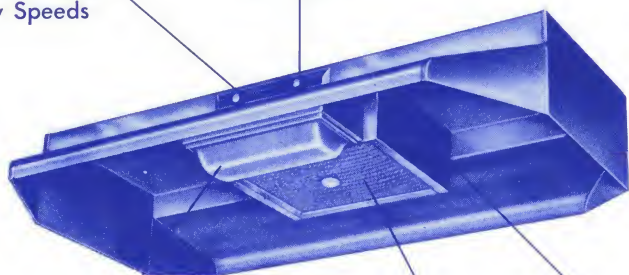

Concealed Light with Prismatic Lens

Large
Washable
Filter

Fan Housing
Built Into
Hood

Exact size of a Hood is $\frac{3}{16}$ " less than given size.


Example: A 36" Hood measures $35\frac{13}{16}$ ".




- Powerful Vertical Discharge Hood-Fan
- 4 position Selector Switch for correct Fan speed.
- Venturi ring Discharge Collar built in to top of hood.
- No reducer needed — fits standard 7" round duct.
- Fan housing built into hood.
- Weather sealed Damper section included.
- Large 99 square inch Aluminum Filter included.
- Enclosed light with Prismatic Lens lights entire range.
- Hood has two "faces" which provide additional area for catching cooking greases, odors and excess heat.

Size	Model	Finish	List	H.V.I. Performance Rating	Splash Plates 22" high			
					Model	List		
36"	1521N	Copper Enamel	59.95	250	Includes Hood, Fan, Built-In weather sealed Damper and Filter.			
	1525N	Silver Anodized Aluminum	69.95					
	1526N	Copper Anodized Aluminum	69.95					
42"	1531N	Copper Enamel	61.95	250				
	1535N	Silver Anodized Aluminum	71.95					
	1536N	Copper Anodized Aluminum	71.95					

NuTone Anodized Finishes will not rust, stain or tarnish

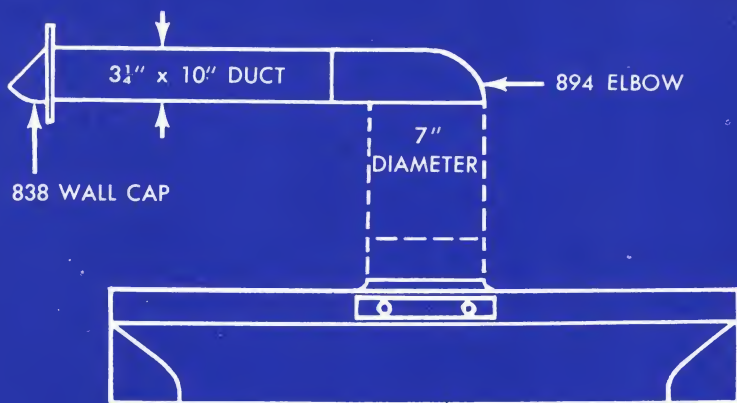


↑ Typical Ducting Installation

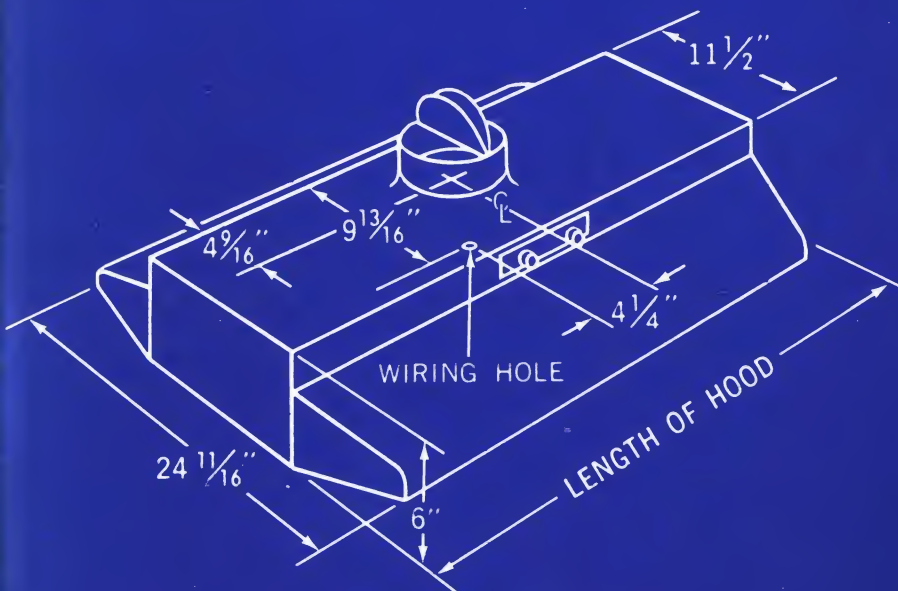



3200 Series Fold-Away Oven Hood-Fan

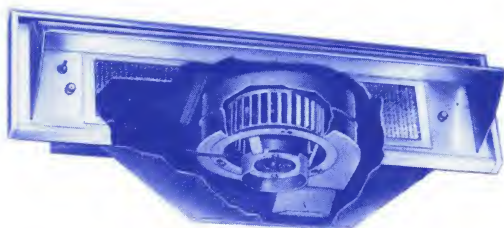

Cutaway view of Oven Hood shows Blower, Blower Housing, Filter and Switch



Exhaust fan turns "on" automatically when the Hood swings out.



Push Hood back to flush position . . . and the fan turns off automatically.

- Protects cabinets from damage caused by heat, grease and smoke which escape when the door is opened.
- Fan exhausts right amount of air without disturbing the baking temperatures.
- Filter, Hood and Fan easily removed for cleaning.
- Blends with all gas or electric built-in ovens.
- Compact, wastes no cabinet space.
- Does not interfere with oven vents.
- Includes built-in damper.
- NuTone Motor guaranteed for 5 years.
- Combine choice of Hood size with Power Unit (Model 3260) to make complete Oven Hood-Fan. (Includes Hood, Fan and Filter.)

Size	Model	Finish — Description	List
24"	3208	Stainless Steel	17.45
	32089	Colonial Copper Enamel	17.45
27"	3218	Stainless Steel	17.45
	32189	Colonial Copper Enamel	17.45
32"	3228	Stainless Steel	17.45
	32289	Colonial Copper Enamel	17.45
Fits above Sizes	3260	Power Unit. Fits above hoods to make complete Oven-Hood Fan.	34.50



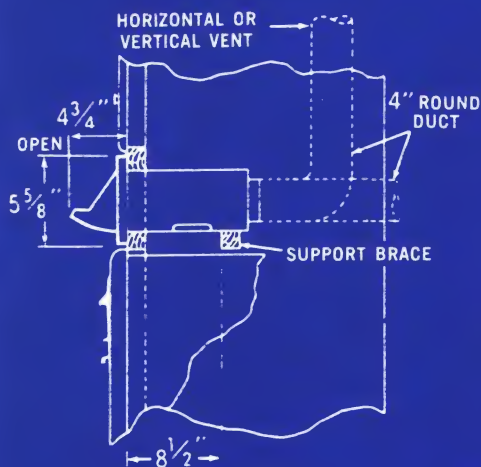


FIG 3

SIDE VIEW

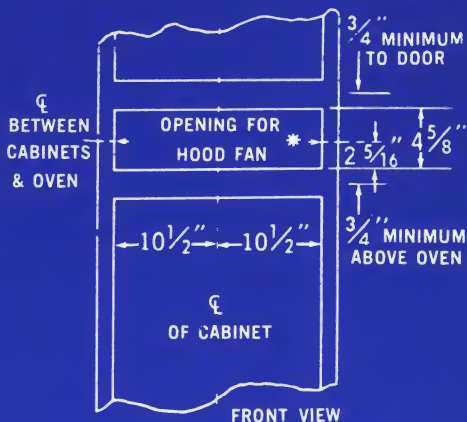

FRONT VIEW

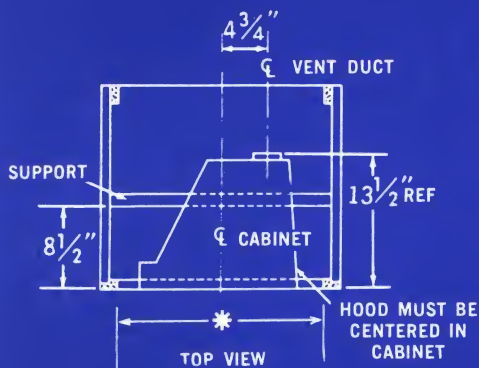

* Cutout size

for 24" Hood: 22" to 22 1/2"


for 27" Hood: 25" to 25 1/2"

for 32" Hood: 30" to 30 1/2"

See pages 46 thru 49
for Ventilation Accessories




8000 Series 8" Pull Chain Wall Fan

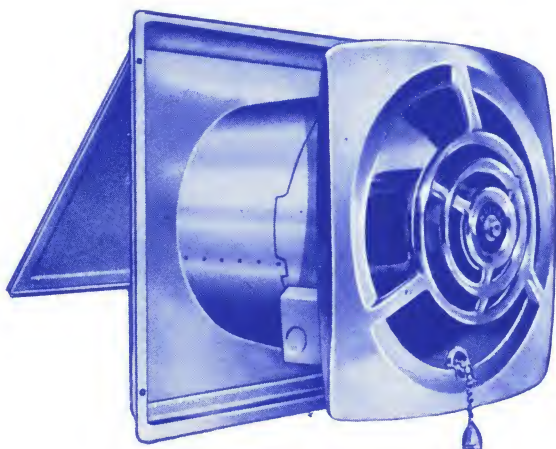


- For smaller rooms.
- One-piece Grille installs with a single thumb-screw.
- "Plug-In" Motor and Blade assembly.
- Electronically balanced Aluminum Blades.
- Pre-wired Outlet Box.
- Installs in wood or brick walls.
- Extra large outside wall panel.
- Swivel Chain-Catch.
- Sleeves telescope to exact wall thickness.



Model No.	Grille Finish	Wall Thickness	H.V.I. Certified in square feet			List Price
			Kitchen	Bath	Other	
8000	White Enamel	5" to 10 $\frac{1}{8}$ "	125	Over 200	325	26.95
8020		9" to 14 $\frac{1}{8}$ "				
8040		3 $\frac{3}{8}$ " to 6 $\frac{1}{4}$ "				
8010	Silver	5" to 10 $\frac{1}{8}$ "	125	Over 200	325	27.95
8030	Anodized	9" to 14 $\frac{1}{8}$ "				
8050	Aluminum	3 $\frac{3}{8}$ " to 6 $\frac{1}{4}$ "				

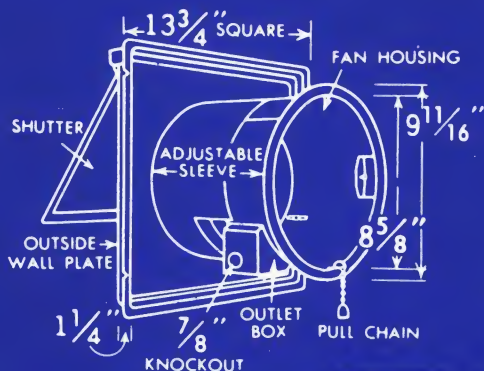

MOTOR
ASSEMBLY



Typical Installations

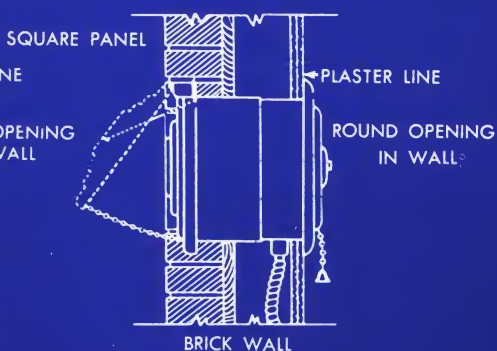




8110 Series 10" Pull Chain Wall Fan




- For medium and larger rooms.
- One-piece Grille installs with a single thumb-screw.
- "Plug-In" Motor and Blade assembly.
- Electronically balanced Aluminum Blades.
- Pre-wired Outlet Box.
- Installs in wood or brick walls.
- Sleeves telescope to fit wall thickness.
- Swivel Chain-Catch.
- Extra large outside wall panel.

Model No.	Grille Finish	Wall Thickness	H.V.I. Certified in square feet			List Price
			Kitchen	Bath	Other	
8110	Silver Anodized Aluminum	5" to 10 $\frac{1}{8}$ "	250	Over 200	Over 500	36.25
8130		9" to 14"				

Model 8110 Series – 10" Pull Chain Wall Fan

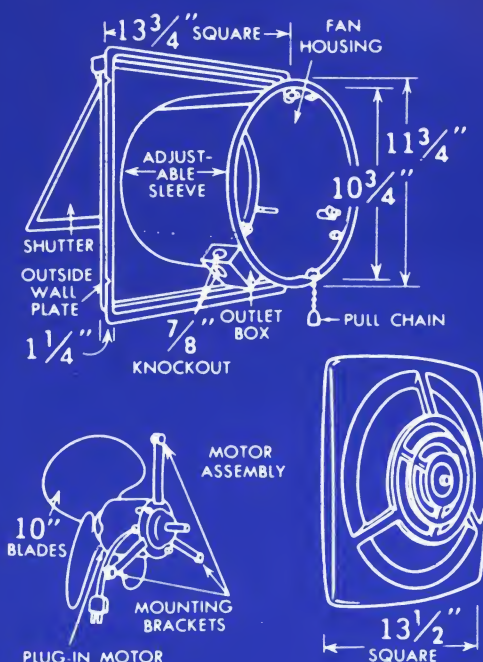


Typical Installations

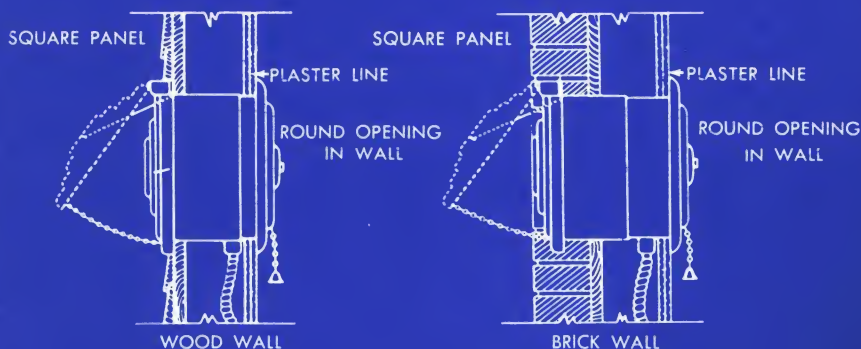





8060 Series 8" Automatic Wall Fan

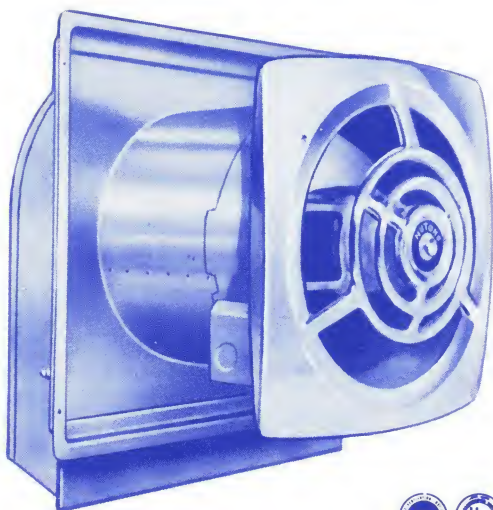



- One-piece removable Grille installs with a thumb-screw.
- Felt-sealed automatic flutter-proof Shutter.
- Air-Divider for quiet operation.
- Weather-protected Hood.
- Venturi Housing ring fits into 9 $\frac{1}{8}$ " diameter wall opening.
- "Snap-In" Motor and Blade assembly.
- Electronically balanced Aluminum Blades.
- Installs in wood or brick walls.
- Pre-wired Outlet Box.
- Use Model 861 three-speed Switch.

Model No.	Grille Finish	Wall Thickness	H.V.I. Certified in square feet			List Price
			Kitchen	Bath	Other	
8060	White	5" to 10"	80	150	200	26.95
8080		9" to 14"				
8070	Silver Anodized Aluminum	5" to 10"	80	150	200	27.95
8090		9" to 14"				

Model 8060 Series – 8" Automatic Wall Fan

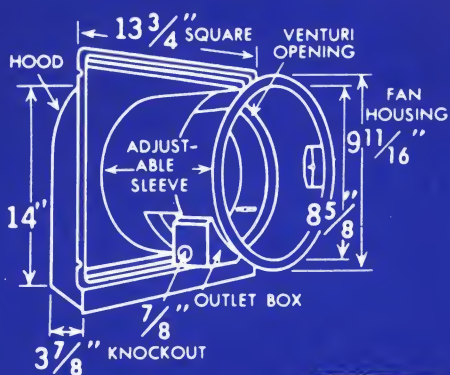


Typical Installations

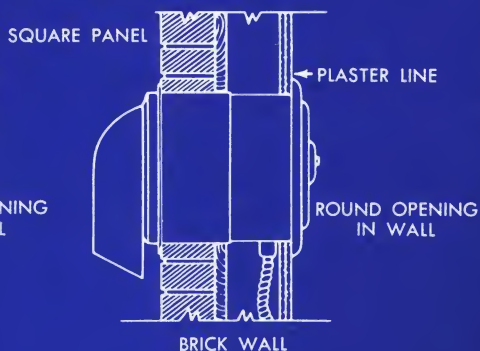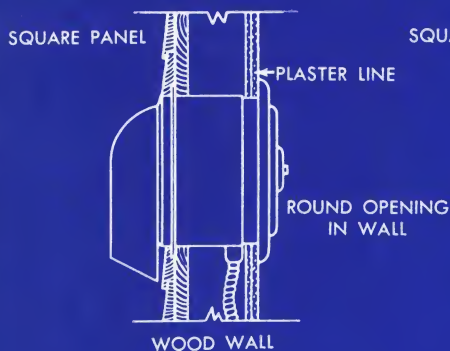




8170 Series 10" Automatic Wall Fan

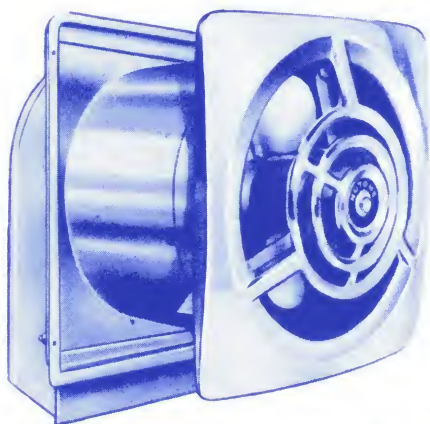


- Anodized Aluminum Grille installs with a thumb-screw.
- Felt-sealed automatic flutter-proof Shutter.
- Air-Divider for quiet operation.
- Weather-protected Hood.
- Venturi ring housing fits into 11 $\frac{1}{8}$ " diameter wall opening.
- "Snap-In" Motor and Blade assembly.
- Electronically balanced Aluminum Blades.
- Installs in wood or brick walls.
- Pre-wired Outlet Box.
- Highest H.V.I.-Rated Automatic Fan.
- Use Model 860 three-speed Switch.

Model No.	Grille Finish	Wall Thickness	H.V.I. Certified in square feet			List Price
			Kitchen	Bath	Other	
8170	Silver Anodized Aluminum	5" to 10"	125	Over 200	325	36.25
8190		9" to 14"				

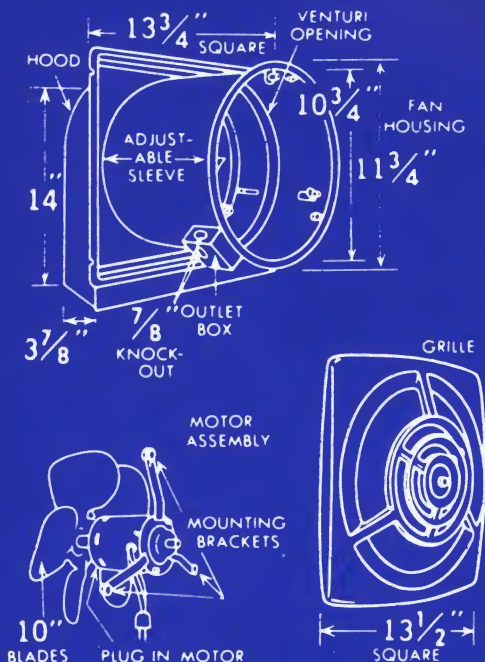


Typical Installations

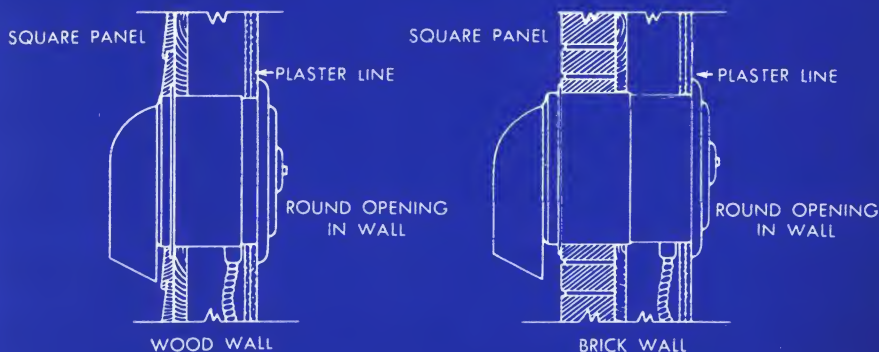



8310—8" Ceiling or Wall Fan

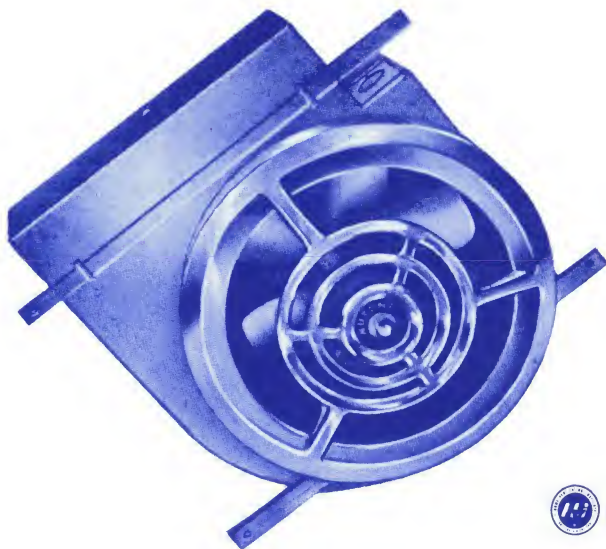


- For smaller rooms.
- One-piece Anodized Aluminum Grille with thumb-screw.
- Venturi ring housing fits 2" x 4" construction.
- "Snap-In" Motor and Impeller-type Blade assembly.
- Electronically balanced Aluminum Blades.
- Prewired outlet box.
- Hanger-Bars included for mounting to studding or joists.
- Adjustable plaster ring hides rough edges of plaster or plaster board.
- Use Model 860 three-speed Switch.
- Filter, Model 834, available (extra).


Model No.	Blade Size	Grille Finish and Size	H.V.I. Certified in square feet			List Price
			Kitchen	Bath	Other	
8310	8"	Silver Anodized Aluminum	80	150	200	27.95

NuTone Anodized Finishes will not rust, stain or tarnish

Model 8310—8" Ceiling or Wall Fan

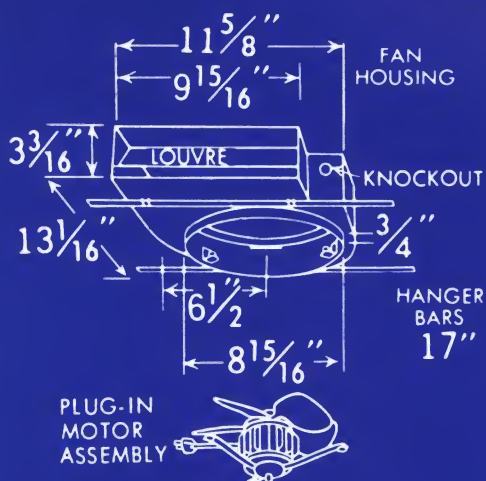

Typical Ceiling Installation

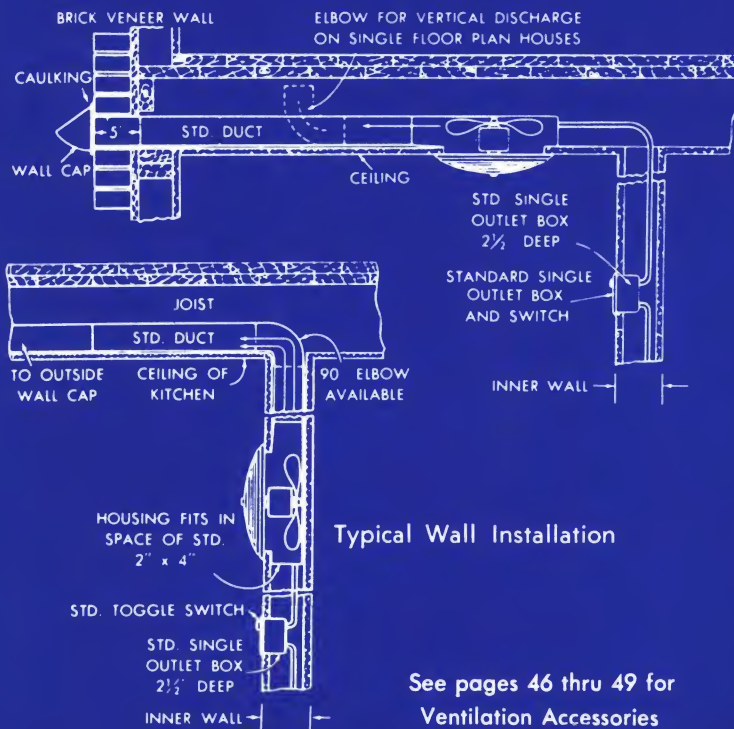

Typical Wall Installation

See pages 46 thru 49 for
Ventilation Accessories



8510--10" Ceiling or Wall Fan




- For medium or larger rooms.
- One-piece Anodized Aluminum Grille installs with thumb-screw.
- Housing fits 2" x 4" construction.
- "Snap-In" Motor and pressure type Blade assembly.
- Scroll-type Housing.
- Prewired outlet box.
- Choice of top or side wiring.
- Electronically balanced Aluminum Blades.
- Adjustable plaster ring hides rough edges of plaster or plaster board.
- Use Model 860 three-speed Switch.
- Filter, Model 854, available (extra).



Model No.	Blade Size	Grille Finish and Size	H.V.I. Certified in square feet			List Price
			Kitchen	Bath	Other	
8510	10"	Silver Anodized Aluminum	150	Over 200	375	36.95

NuTone Anodized Finishes will not rust, stain or tarnish

Model 8510—10" Ceiling or Wall Fan

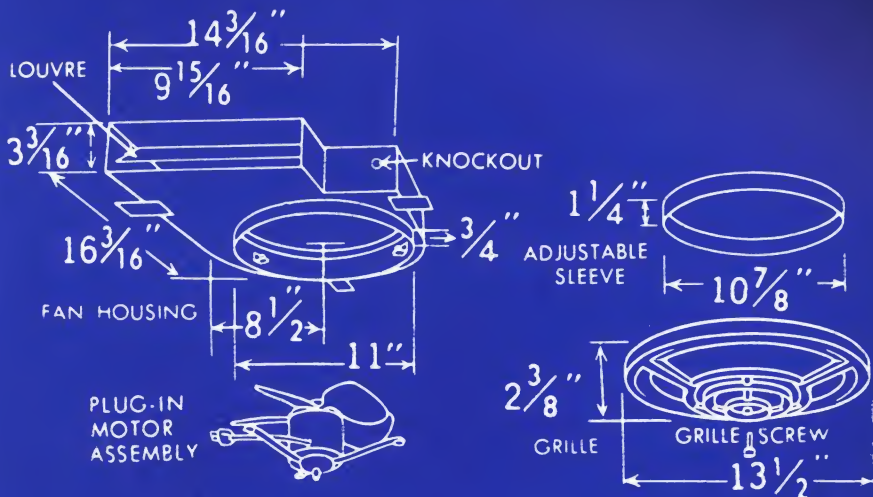

Typical Ceiling Installation

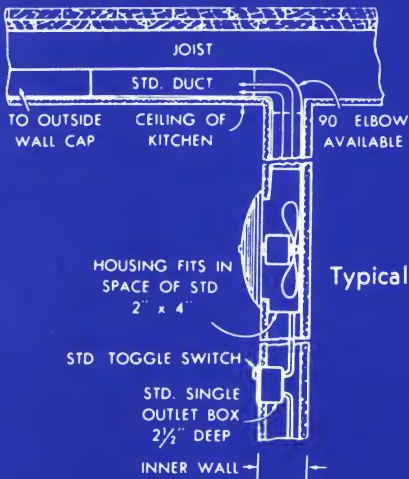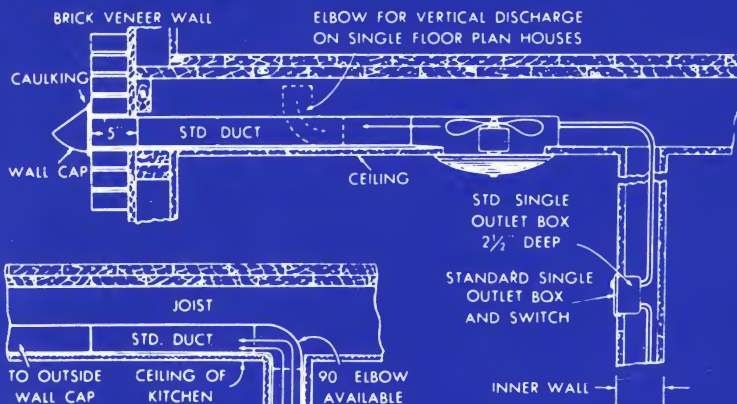

Typical Wall Installation

See pages 46 thru 49 for
Accessories





- For medium size rooms.
- Installs in ceiling. Ventilates to the roof.
- One-piece removable Anodized Aluminum Grille.
- Fits 9 $\frac{1}{8}$ " diameter ceiling opening.
- Removable Outlet Box and Outlet Box Cover.
- Adjustable Mounting-Brackets for plaster variations.
- Electronically balanced Aluminum Blades.
- Self lubricating motor.
- Hanger Bars included.
- Model 8210 includes Built-In weather sealed Dampers.
- Damper section for Model 8200 available (extra).
- Filter, Model 834, available (extra).
- Use Model 860 Three-Speed Switch.

Model No.	Blade Size	Grille Finish	H.V.I. Certified in square feet			List Price
			Kitchen	Bath	Other	
8200	7"	Silver Anodized	125	Over 200	325	22.95
8210		Aluminum	100	185	250	23.95


NuTone Anodized Finishes will not rust, stain or tarnish

Model 8200 Series – Jet-Flo Vertical Discharge Fan

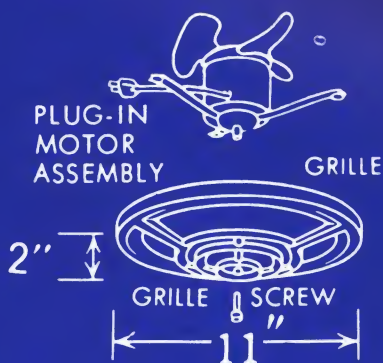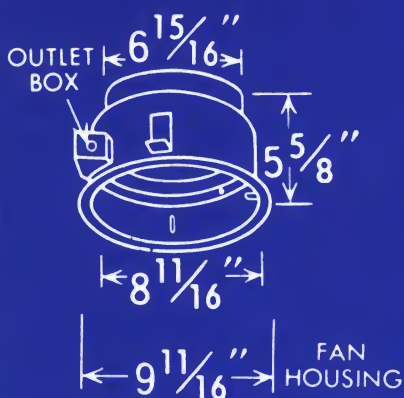

Typical Installation

MODEL 845 ROOF CAP WITH WEATHER SEAL LOUVER

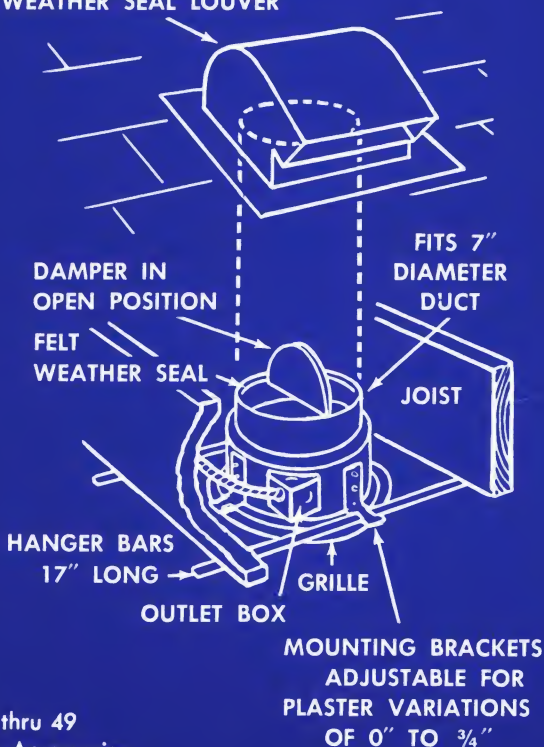



Model 8220—8" Vertical Discharge Fan




- For smaller rooms.
- Installs in ceiling. Ventilates to the roof.
- One-piece Anodized Aluminum Grille installs with single thumb screw.
- "Plug-In" Motor and Blade assembly.
- Fits 9 $\frac{1}{8}$ " diameter ceiling opening.
- Electronically balanced Aluminum Blades.
- With Model 823 Reducer with damper fits 8" diameter duct (extra).
- Adjustable Mounting-Brackets for plaster variations.
- Hanger Bars included.
- Filter, Model 834, available (extra).
- Use Model 860 Three-Speed Switch.

Model No.	Blade Size	Grille Finish	H.V.I. Certified in square feet			List Price
			Kitchen	Bath	Other	
8220	8"	Silver Anodized Aluminum	80	150	200	20.95


NuTone Anodized Finishes will not rust, stain or tarnish

Model 8220 — 8" Vertical Discharge Fan

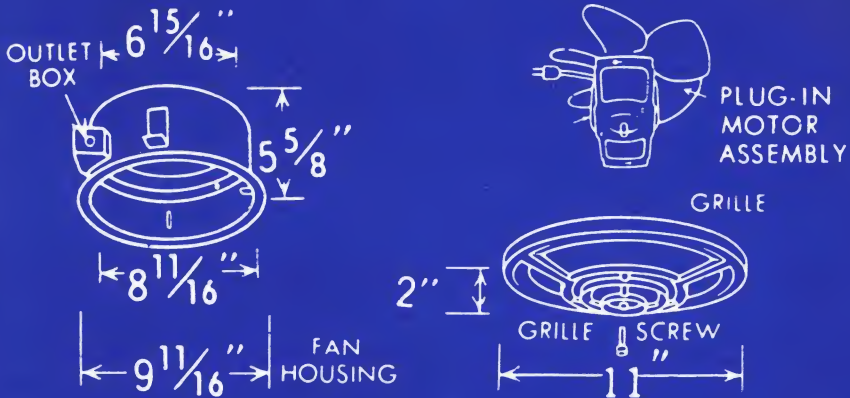

Typical Installation

MODEL 845 ROOF CAP WITH WEATHER SEAL LOUVER

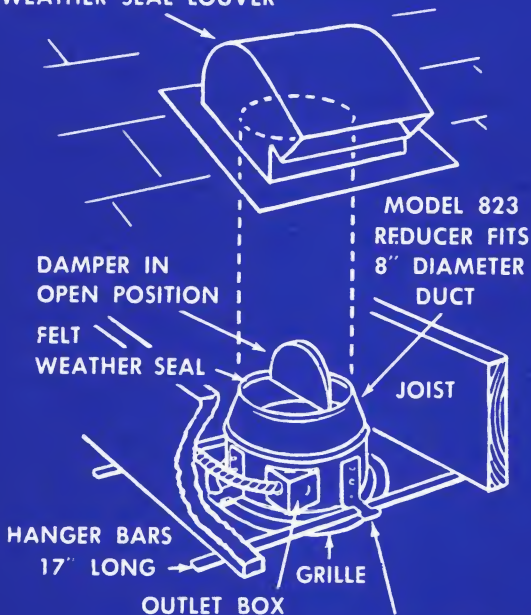

See pages 46 thru 49
for Ventilation Accessories

MOUNTING BRACKETS
ADJUSTABLE FOR
PLASTER VARIATIONS
OF 0" TO 3/4"



Model 8490—10" Vertical Discharge Fan




- For medium and larger rooms.
- Installs in ceiling. Ventilates to the roof.
- One-piece removable Anodized Aluminum Grille.
- Fits 11" diameter ceiling opening.
- Hanger bars included.
- Electronically balanced Aluminum Blades.
- One-piece scoop pitched blades.
- Housing, with Reducer, fits 8" diameter duct.
- Built-in Air Vanes in Reducer.
- Adjustable Mounting Brackets for plaster variations.
- Use Model 860 three-speed Switch.
- Filter, Model 854, available (extra).


Model No.	Blade Size	Grille Finish	List Price	H.V.I. Certified* in square feet		
				Kitchen	Bath	Other
8490	10"	Silver Anodized	32.75	125	Over 200	Over 325

H.V.I. rating based on tests with reducer and damper in fan.

Model 8490—10" Vertical Discharge Fan

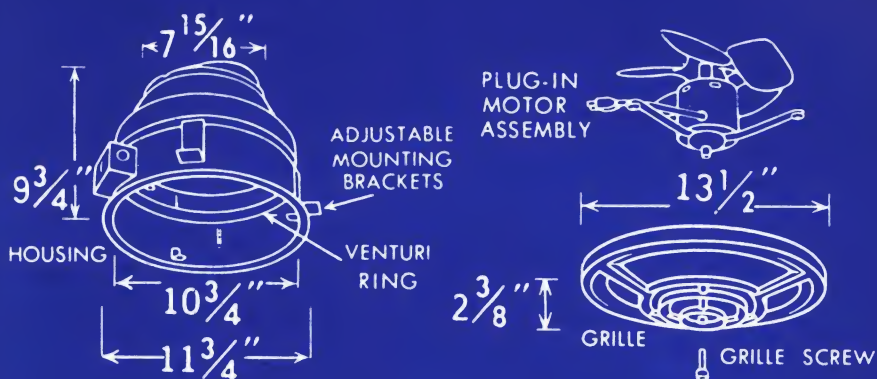

Typical Installation

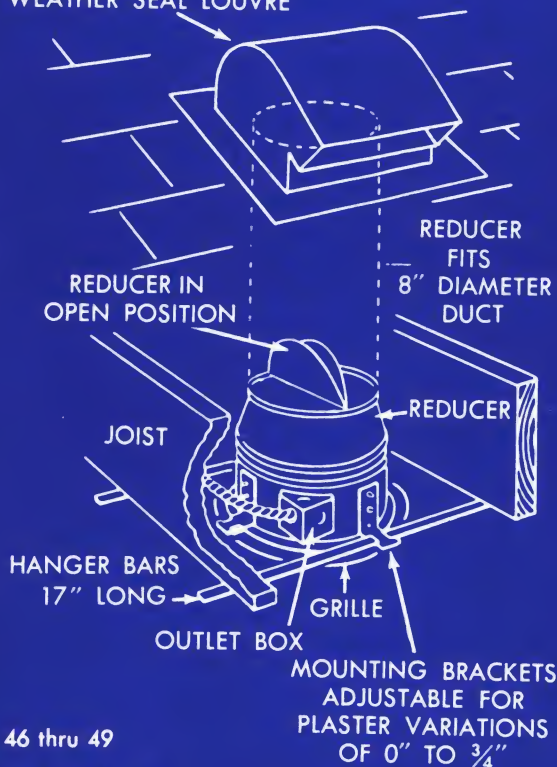

**See pages 46 thru 49
for Ventilation Accessories**



Model 8700 Series Twin Blower Exhaust Fan





- Twin-Blower, full pressure-type Fan.
- Adjustable for vertical or horizontal discharge.
- For installation in Kitchen cabinets on inside or outside wall. Also for dual-level installation in ceiling or soffit.
- Two powerful centrifugal Blowers.
- Housing with "Lifetime" Dura-Kote finish, fits inside of cabinet.
- Patented "Snap-In" Anodized Aluminum Grille.
- Fits 3¼" x 10" duct.
- Filter, Model 879, for Models 8700 and 8710 available (extra).
- Model 875 Cabinet Mounting-Kit for cabinet installations — includes the Filter.
- Use Model 860 three-speed Switch.

Model No.	Grille Finish	Duct Size	H.V.I. Certified in square feet			List Price
			Kitchen	Bath	Other	
8700	Silver	3¼" x 10"	100	185	250	39.50
8720*	Anod. Alum.					43.50
8710	Copper					39.50
8730*	Anod. Alum.					43.50


* Includes cabinet mounting kit and filter

NuTone Anodized Finishes will not rust, stain or tarnish

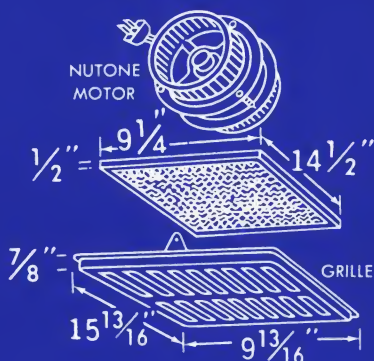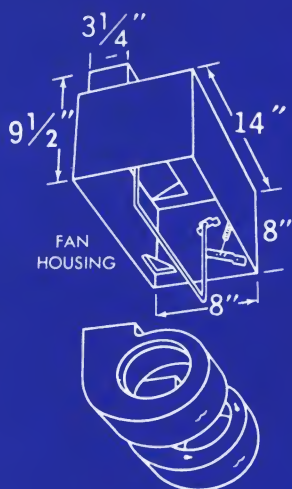

See pages 46 thru 49 for Ventilation Accessories

Typical Installation

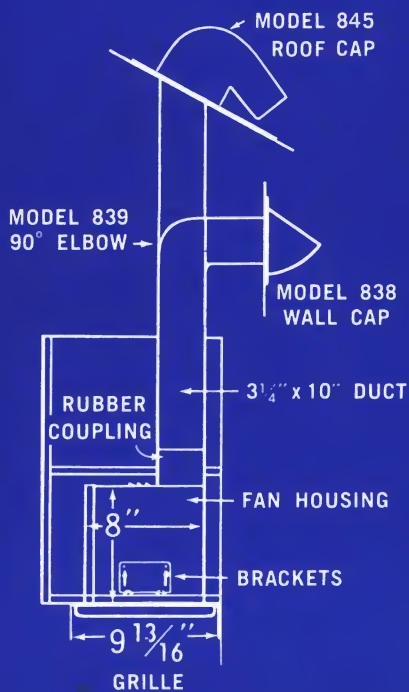





Model 8830 Wall or Ceiling Bathroom Fan




- Louver grille . . . permits free flow of air, yet conceals inside. Screw holds grille tight. No rattles.
- Less than 4" thin — fits in ceiling or between 2" x 4" studs. Discharges to outside thru 3" dia. duct.
- For draft free, odor free, moisture free bathroom.
- Designed especially for bathroom use where closed doors require a fan with high static pull.
- Cut out for housing 7 $\frac{1}{4}$ " x 8 $\frac{7}{8}$ ". Grille 8 $\frac{1}{8}$ " x 10 $\frac{1}{8}$ ".
- Mounts to joists or studding with hanger bars.
- Plug-in motor is spring mounted for quiet operation.

Model No.	H.V.I. Certified in square feet			List Price
	Kitchen	Bath	Other	
8830	Not used	65	90	23.95


NuTone Anodized Finishes will not rust, stain or tarnish

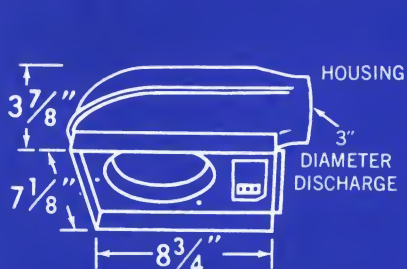

Typical Wall Installation

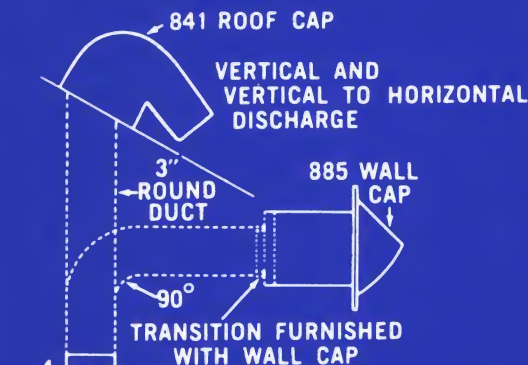

See pages 46 thru 49
for Ventilation Accessories

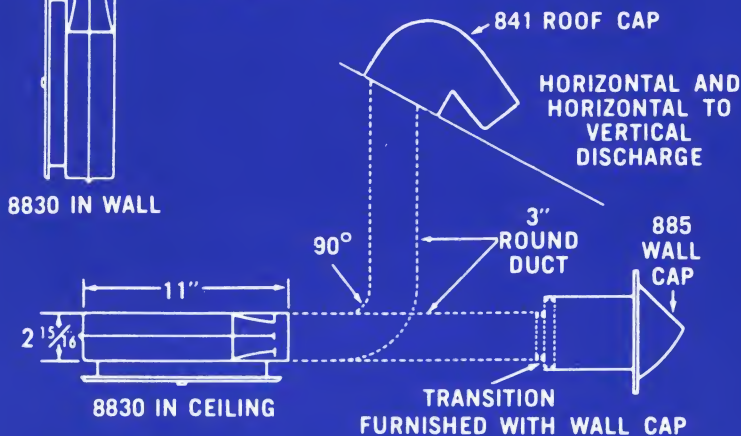

Typical Ceiling Installation



Model 8810 Ceiling Bathroom Fan




- Designed especially for bathroom use.
- Discharges through 4" dia. duct to roof or to outside wall.
- Cutout for housing: 8½" x 6⅞". Grille 8⅞" x 10⅞".
- Adjustable bracket . . . No blocking between joists.
- Removable Flange . . . Allows smaller ceiling opening.
- Damper keeps out chilly drafts.
- Moistureproof motor.
- Convenient handle . . . for "Snap-in" installation.

Model No.	H.V.I. Certified in square feet			List Price
	Kitchen	Bath	Other	
8810	Not used	75	100	25.95


NuTone Anodized Finishes will not rust, stain or tarnish


Model 8810 — Ceiling Bathroom Fan

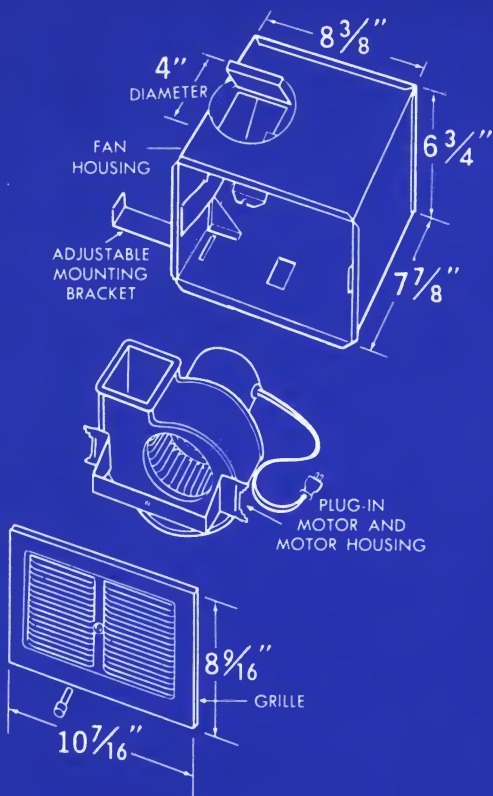

Typical Installation

See pages 46 thru 49 for
Ventilation Accessories

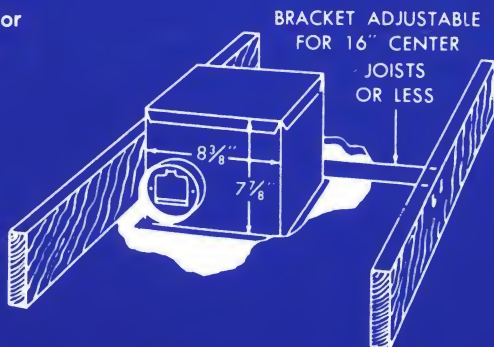

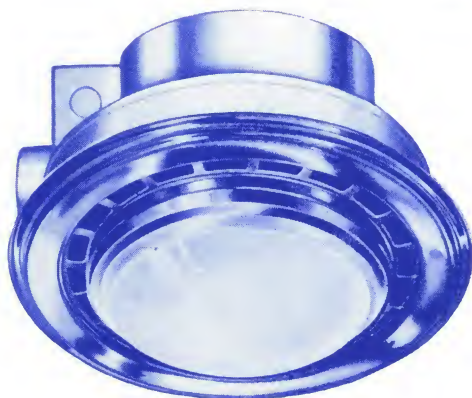


- Electronically balanced Aluminum Fan Blades.
- Fan Blower exhausts air without causing chilly drafts.
- It's round — provides more and better lighting.
- Installs easily between 2" x 6" joists.
- Hinged lens for replacement of 100 watt bulb.
- Housing 5 $\frac{1}{8}$ " deep, 10 $\frac{1}{2}$ " dia. has $\frac{1}{2}$ " plaster flange.
- Discharges thru 4" dia. duct to outside wall or roof.
- Includes 3 adjustable brackets and 2 hanger bars.
- Overall depth below ceiling 2 $\frac{1}{8}$ " including lens.
- Motor is spring mounted for quiet operation.


Model No.	Light * Bulb	H.V.I. Certified in square feet			List Price
		Kitchen	Bath	Other	
8660	100 Watts	Not used	75	100	36.95

* Not included

NuTone Anodized Finishes will not rust, stain or tarnish

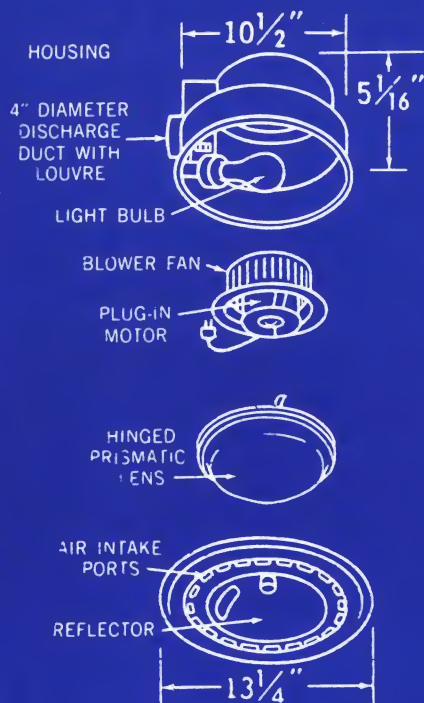

Typical Installation

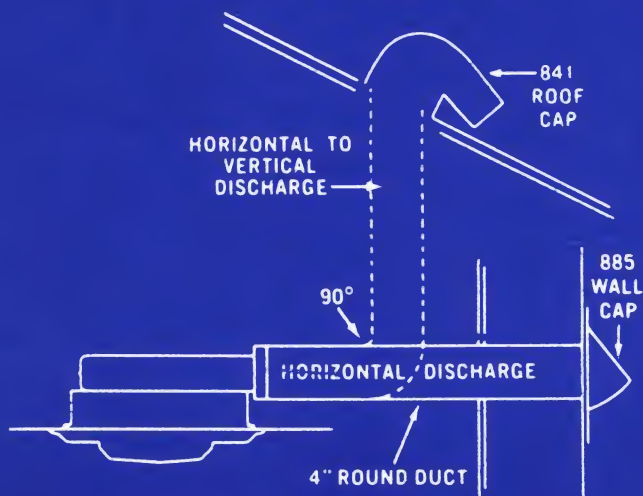




Model 8140 Room-to-Room Fan




- Moves air from one room to another.
- Ideal for air-conditioned homes, to move cool air from one room to another.
- Fits 9¼" square wall opening.
- Adjustable for 2⅝" to 5¼" thick walls.
- White Enamel Housing and Grille.
- May be painted to match walls.

Model	Blade Size	Grille Finish	Grille Size	List Price
8140	8"	White Enamel	10½" square	21.95

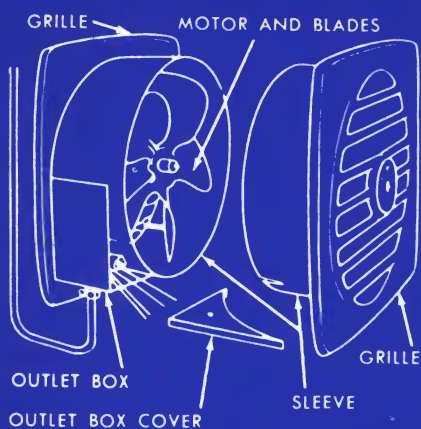

Typical Installation

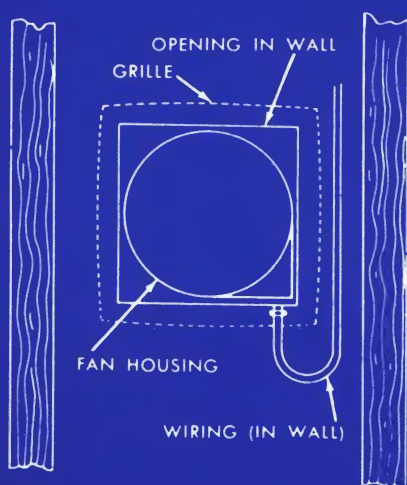





Ventilating Accessories




Model 823 Reducer
with split damper for
Model 8220 Fan.
\$2.60


Model 824 Elbow
with damper for
Model 8220 Fan.
\$3.70




Model 825 Extension
Sleeves for 8" Wall
Fans 14 1/16" to 21 15/16"
for regular models.
14 1/16" to 25 15/16" for
long models. \$2.10




Model 827 Extension Sleeves
for 10" Wall Fans 14 1/16" to
21 15/16" for regular models.
14 1/16" to 25 15/16" for
long models. \$2.10




Model 834 Filter
9 1/2" diameter for
Models 8200, 8210,
8220, 8310, 8060-8090
\$2.10




Model 836
Eave Cap with damper
\$5.60



Model 837 Flush Wall
Cap with damper.
Also available with
Aluminum Grille for
Commercial Buildings \$5.60



Model 838 Two Piece
Wall Cap with damper
\$4.95



Model 839 Elbow
\$3.30

Model 840 4" Round
adjustable Elbow for
4" diameter duct.
\$2.00



Ventilating Accessories




* Model 841 Roof Cap with weather louver. For duct sizes up to 4" diameter. \$4.75



Model 842

Activated Charcoal Odor Filter for Triple Aire Filter Attachment (for 3100 Series) \$5.00




Model 843


Smoke Filter for Triple Aire Filter Attachment (for 3100 Series) \$5.00



* Model 845 Roof Cap with damper, for ducts up to 10" dia. Can be used on flat roofs. \$8.50



Model 846 Wall Cap for use with 5000 Series Hood-Fans only \$6.75



Model 854 Filter 11 1/2" diameter for Models 8490, 8510 8170-8190. \$2.30

Model 855

Replacement Smoke Filter for Non-Ducted 3400 Series Hood-Fan. \$1.75



Model 856

Replacement Charcoal Odor Filter for 3400 Series Non-Ducted Hood-Fans. \$9.95



Model 860. For all NuTone Fans except 8060 thru 8090 and Pull Chain Type. \$6.25

Model 861 3 Speed Switch for Models 8060-8090 Fans. \$6.25






Ventilating Accessories



Model 862. For use with
all NuTone Fans except
Pull Chain Type.
\$8.80




Model 874 Duct
3 1/4" x 10" x 18" long
\$2.60




Model 875
Installation Kit for
Installing 8700-8710
Fans in Kitchen Cabinet
\$3.10



Model 876
Damper Section fits
3 1/4" x 10" Ductwork.
\$3.85




Model 877
Round Transition
\$3.50




Model 879 Filter
for Models 8700-8710
Twin Blower Fans.
\$4.15




Model 885 Wall Cap
with weather louver.
For use with 3" or
4" duct. \$3.10



Model 886 Round
Transition for 1100 N
Series Hood-Fans, Model
8200 and 8210 Fans.
\$3.50




Model 887
Round Duct
7" diameter 18" long.
\$1.80




Model 888
Flat Elbow. \$4.00

Ventilating Accessories



Model 889 Duct
5 Sections — Each section
3 1/4" x 10" x 24" long
5 sections \$12.60
Price for 1 section \$2.52




Model 890
7" Round Duct
5 Sections, each 24" long.
Price for 5 sections \$9.50
Price for 1 section \$1.90




Model 894 Elbow for
1100 N Series Hood-Fan,
Model 8200 and
8210 Fans. \$3.70




Model 895
Damper Section for
Model 8200 Fan
Fits 7" round duct
\$2.60




Model 897
Transition Elbow for
3000 and 6000
Series Hood-Fans
\$5.50



Model 898
Right Reverse Elbow
for 3000 and 6000
Series Hood-Fans
\$5.50



Model 899
Left Reverse Elbow
for 3 1/4 to 10" duct
\$5.50



Model 1000
Round Duct 8" diameter
18" long.
\$1.95

Model 859
Wall Mounting
Kit for 3400
Series Hood Fan.
\$2.00

(not shown)



Built-In Stereo Music Amplifier




- 4-Way Stereo System Master Control, with Intercom . . . Built-in.
- Fits into standard 2"x 4" walls.
- Balance Control for perfect equalization of both stereo channels.
- Loudness Control permits low volume level listening without losing highs and lows.
- Separate Bass and Treble Controls insure musical emphasis tailored to individual taste.
- "On-Off" switch controls the entire system, including Intercom.
- Selector-Switches for individual control of Stereo plus intercom or monaural plus intercom.
- Tilt-out feature for removal of Amplifier without disturbing remote-station Intercom wiring.
- All wires are completely color-coded.
- Hand-rubbed Walnut frame, with Gold Anodized Control Panels.
- Power output: 30 watts; input: 110-130 volts, AC, 60 cycle, 95 watts.
- Transformer power supply has line voltage adjusting switch.
- Tubes: 1-6AV6, 1-EZ81, 1-12AU7, 3-12AX7, 4-6AQ5.
- Add all or any 1 of the matching Stereo Components: Stereo Radio Tuner, Stereo Record-Changer, Stereo Tape Recorder shown on page 52, plus Speakers shown on page 54.


Model 2401 — Complete (A and B Units) \$228.00 List

For NuTone Electronic Door Chimes that connect with this system, see Models L-70, L-71, L-72, pages 88-89

NuTone Stereo-Intercom Speakers and components cannot be used with NuTone Intercom-Radio Systems.

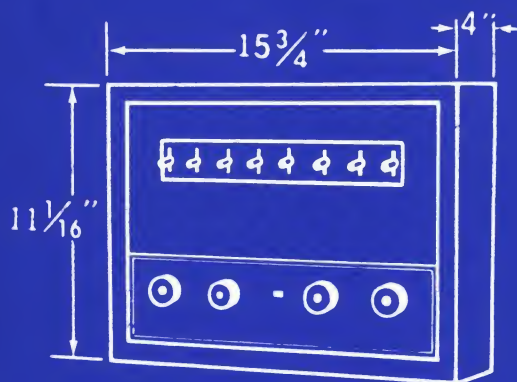

Model 2401

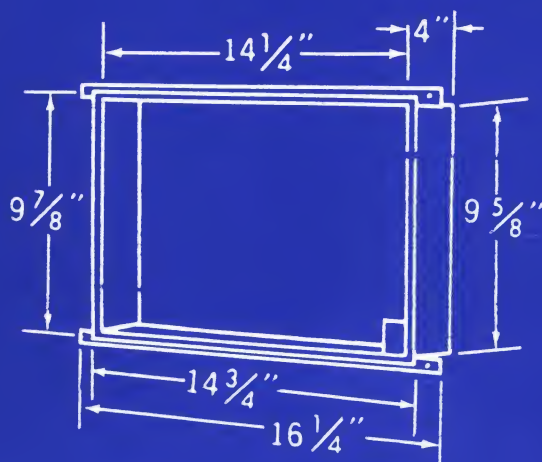


Model 2401-A Housing



Built-In Stereo Tuner, Record Player and Tape Recorder

Hi-Fidelity AM and FM Radio Tuner Model 2402

- Permits use of 1 speaker-system for an AM program, the other for an FM program, simultaneously.
- Selective Slide-Rule tuning. No drift or fading.
- High image rejection — hi-fidelity FM de-emphasis compensation.
- Stamped, labeled controls and connectors insure correct wiring, even if the cover is removed.
- Input plug and switch for auxiliary equipment.
- Provision for adapting to FM-Multiplexed Stereo reception.
- Walnut frame with Gold Anodized control panels.
- Transformer supply line has line-voltage adjusting switch.



- Tubes: 6BA6, 6BE6, EZ80, 6AL5, 2-6AU6, 2-6AV6, 2-6AB4.
 - FM sensitivity: 3UV (20db quieting).
- Complete (A and B Units) \$199.90 List



Complete \$349.50 List

Tape Recorder Model 2405

- Hi-Fidelity, portable Tape Recorder for Stereo or monaural recording and play-back of 2 and 4-track tape.
- Has built-in recording and play-back preamplifiers.
- Finest Stereo and Hi-Fidelity reproduction, without any wear on the tape.
- Can record and play back anything going through the NuTone Amplifier.
- Fits into Record-Storage Cabinet, Model 2404.
- 2 VU Meters for accurate setting of recording levels.
- Record lock-position — no accidental erasing of tape.
- 2 speeds: $7\frac{1}{2}$ IPS and $3\frac{3}{4}$ IPS. UP to 7" reels.
- Up to 4 hrs. of Stereo playing time per reel; up to 8 hrs. of monaural playing time.
- Individual volume control of each channel, for both record and play-back.

Record Changer Model 2403

- Plays all speeds of conventional records.
 - Intermixes 10" and 12" records of same speed.
 - Diamond stylus (.0007") for Stereo and LP's.
 - Sapphire stylus (.003" tip) for 78 RPM's.
 - "Slumber Switch" — permits last record to shut off the entire system, or all but Intercom.
 - Input plug and switch for auxiliary equipment.
 - Spring-loaded Vinyl covered steel door cushions sudden impact.
 - Power input: 110-130 volts AC, 60 cycle, 15 watts.
- Complete (A and B Units) \$120.00 List




Record-Storage Cabinet Model 2404

- Pre-wired to hold Tape Recorder, 2405.
 - Without Tape Recorder, stores 40 records.
- Complete \$55.00 List


Wire

- Model 2421 — 50' spool 8 conductor wire.
- Model 2422 — 60' spool 2 conductor wire.
- Model 2424 — 250' spool 8 conductor wire.


Built-In Stereo Tuner, Record Player and Tape Recorder

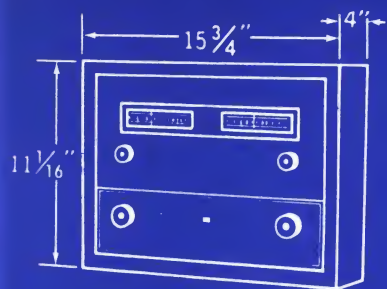


Model 2402

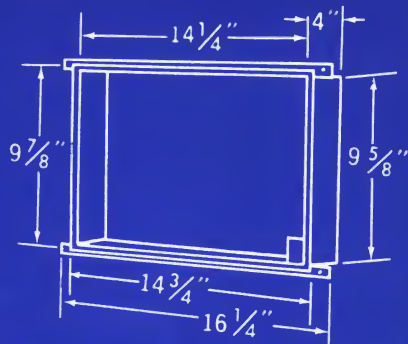


Model 2402-A Housing for Stereo Tuner

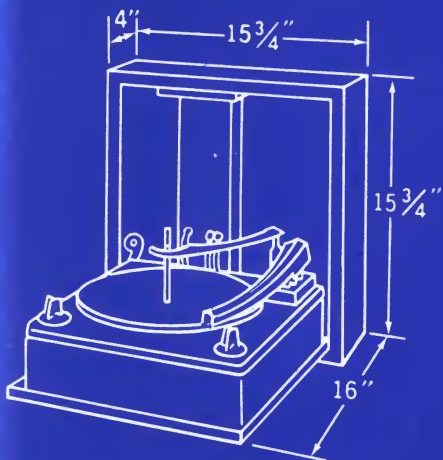


Model 2403 Record Changer

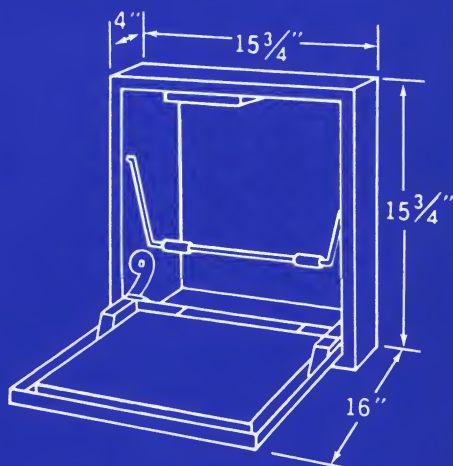

Model 2404-B Record Storage Cabinet

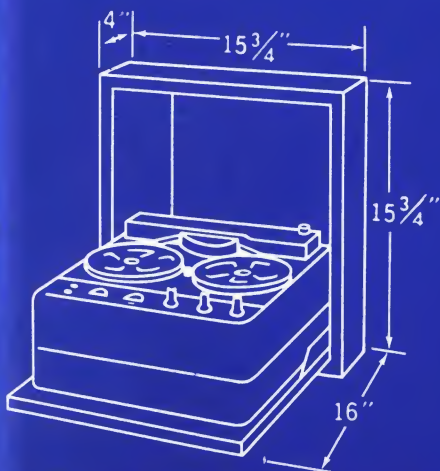

Model 2405 Tape Recorder (fits Record Storage Cabinet)

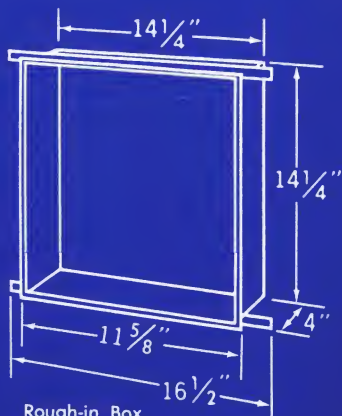

Rough-in Box

Models 2403-A and 2404-A



Speaker Model 2411

- Built-in, for finest tone.
- Use Model 2412 with Model 2416 if Speaker is mounted out of easy reach.
- Has switches for room-to-room Intercom and for door-answering.
- 8" coaxial type, with mechanical crossover.
- Pre-wired harness.
- Walnut frame with Gold-flecked Grille Cloth and Gold Anodized Control Panel.
- Use with Model 2412 (Speaker-Without-Controls) in each room equipped for Stereo reception. Both are controlled at this Speaker, permitting either to be turned off, to allow choice of two monaural programs.

Model 2411 — Complete (A and B Units) \$39.75 List

Model 2412 — Complete (A and B Units) \$22.00 List

Patio Speaker Model 2414

- Moisture-resistant, 8" coaxial Speaker mounts in any outside wall.
 - Weatherproof housing; with non-tarnish plastic Grille.
 - Use with Model 2415 Outside Remote Control. to provide same controls as Inside Speakers.
 - Use 2 for Stereo, 1 for monaural reception.
- Complete (A and B Units) \$17.25 List

Outside Remote Control Panel Model 2415

- Operates Outside Speakers like Inside Speakers, including Intercom switches.
- Sealed housing, recessed panel and corrosion-proof finish. Complete (A and B Units) \$24.75 List

Inside Remote Control Panel Model 2416


- Operates Inside Speakers when they are mounted out of reach.
 - Frame, Grille-Cloth and Panel match Inside Speakers.
- Complete (A and B Units) \$29.75 List

Door Speaker Model 2413

- Mounts in wall, ceiling, or soffit.
 - Outside calls are controlled at Inside Speakers. Eliminates "Talk-Listen" switch outside the home.
 - Concave design assures maximum "pick-up" of normal voice tones.
 - Housing is sealed against moisture.
 - Plastic Speaker-Cone is weatherproof.
 - Corrosion-proof Anodized finish.
- Complete (A and B Units) \$12.75 List

Speaker Model 2419


- The ultimate in Hi-Fidelity Speakers.
 - Mounts on the wall.
 - 12" woofer with oversize 1 lb. magnet and two 3½" tweeters.
 - Use 2 per room for Stereo programs, 1 per room for monaural programs.
 - Use with Model 2416 Inside Remote-Control Panel for complete volume-control of Stereo and monaural programs, and Intercom.
 - Walnut frame with Gold-flecked Grille Cloth.
- Complete \$89.95 List



↑ Model 2414




↑ Model 2415




Model 2416 ↑

Model 2413 →


Model 2419 ↓




Built-In Stereo Music System Wall Speakers




Model 2415 Outside
Speaker Control Panel




Model 2416 Inside
Speaker Control Panel




2415-A and 2416-A
Rough-in Box for
Inside and Outside
Speaker Control Panels,
Models 2415 and 2416




Model 2413
Door Speaker




Rough-in box 2413-A
for Door Speaker

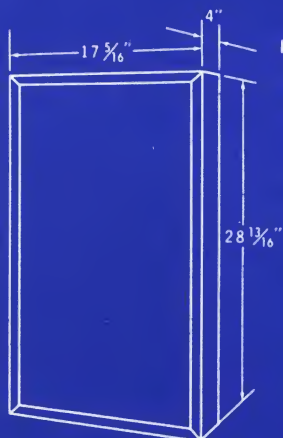


Model 2419
Hi Fidelity Deluxe
Speaker System




Model 2412
Patio Speaker




Model 2411
Inside Speaker
(with controls)



Model 2412
Inside Speaker
(without controls)



Models 2411-A and 2412-A
Rough-in Frame
for Inside Speakers



Model 2414-A Rough-In Box
for Patio Speaker




AM-FM Intercom Radio Systems Models 2057 and 2058



Master Station

- AM-FM Radio-Intercom — Built-In.
- The Custom-Look in Silver or Copper Anodized finish.
- Fits into any wall 2 or more inches thick.
- Transistorized Intercom, with 10 Station-Selector Switches.
- Hi-Fidelity tone for both AM and FM Radio.
- New Meter-Type tuning.
- Cool Chassis, for longer life.
- 8 Tubes; 1 Transistor: 2N233, 6BE6, 6BA6, 6AU6, 6BN4A, 6BL8, 12AX7, 6CU5, EZ80.
- Broadcast ranges: AM 540-1620 Kc.; FM 88-108 Mc.
- Speaker: 8" x 4", 3.2 ohm.
- Power consumption: 55 watts at 120 volts.
- Phono-Jack included.
- Tip-Out Chassis for easy installation.
- Add Room-Speakers and Door Speakers (see below).



2025 • 4" Inside Speaker.




2026 • 5" Inside Speaker.



2006 • Door Speaker.


Model	Description	List
2057	Silver Anodized — Master Station.	\$151.50*
2058	Copper Anodized — Master Station.	151.50*
2025	4" Inside Speaker. Desert Sand Finish.	7.50*
2026	5" Inside Speaker. Desert Sand and Gold.	8.50*
2006	Door Speaker. Gold Anodized.	7.50*
2020-B	8" Hi-Fi Speaker for Inside.	22.00*
2020-B	8" Hi-Fi Speaker for Outside.	23.00*
2040	200 feet 3 Conductor Wire.	6.75
2042	1000 feet 3 Conductor Wire.	24.50

* Price Includes "A" and "B" Units




2020-B 8" Hi-Fi Speaker

AM-FM Intercom Radio Systems – Models 2057 and 2058

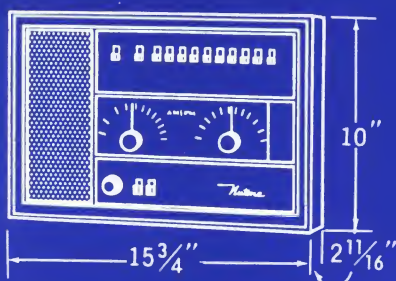


Models 2057 and 2058
Master Station Wall Panel




Models 2025 and 2026
4" and 5" Speaker Wall Panel




Model 2006
Remote Speaker Wall Panel



Model 2020-B Hi Fidelity
Speaker Wall Panel (Inside)

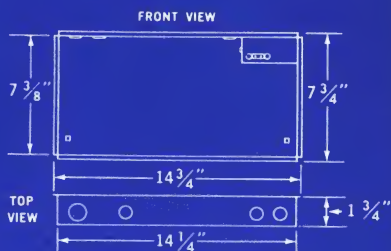



Models 2057 and 2058
Master Station Housing

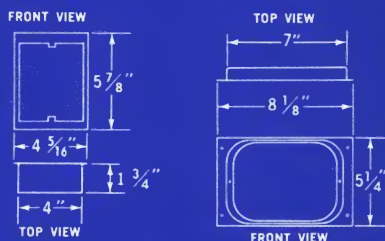

Model 2006
Remote
Speaker Housing

Models 2025 and 2026
4" and 5"
Speaker Housing

Model 2414-A Rough-in Box for 2020-B
for outside installation

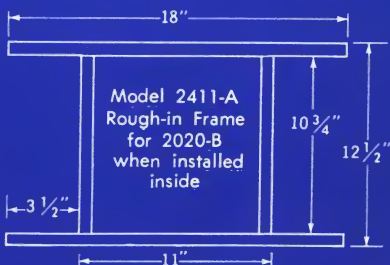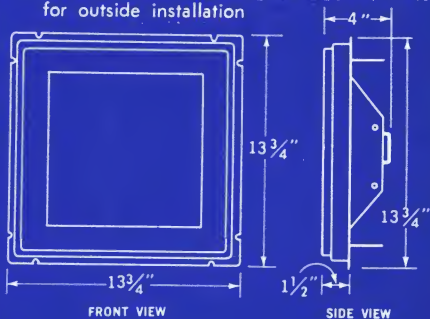

Model 2411-A
Rough-in Frame
for 2020-B
when installed
inside




AM Intercom-Radio Systems Models 2053 and 2054



Master Station

- Intercom and AM-Radio Built-In.
- Deluxe Models in Silver or Copper Anodized finish, with Charcoal Grey Grille.
- Fits into any wall 2 or more inches thick.
- Room-Selector Switches for 8 Intercom Stations.
- Slide-Rule tuning for Radio music throughout the home.
- 5 Tubes: 1-12BE6, 1-12BA6, 1-12AX7, 1-35W4, 1-50C5.
- AM broadcast range: 540 - 1620 Kc.
- 5" round Speaker, 3.2 ohm.
- Power consumption: 33 watts at 120 volts.
- Phono-Jack included.
- Tip-Out Chassis for easy installation.
- Add Room-Speakers and Door Speakers (see below).



2025 • 4" Inside Speaker.




2026 • 5" Inside Speaker.



2006 • Door Speaker.


Model	Description	List
2053	Silver Anodized and Grey — Master Station.	\$83.50*
2054	Copper Anodized and Grey — Master Station.	83.50*
2025	4" Inside Speaker. Desert Sand Finish.	7.50*
2026	5" Inside Speaker. Desert Sand and Gold.	8.50*
2006	Door Speaker. Gold Anodized.	7.50*
2020-B	8" Hi-Fi Speaker for Inside.	22.00*
2020-B	8" Hi-Fi Speaker for Outside.	23.00*
2040	200 feet 3 Conductor Wire.	6.75
2042	1000 feet 3 Conductor Wire.	24.50

* Price Includes "A" and "B" Units




2020-B • 8" Hi-Fi Speaker

AM Intercom-Radio Systems – Models 2053 and 2054

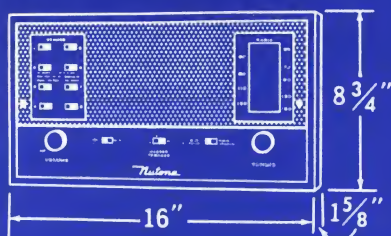


Models 2053 and 2054
Master Station Wall Panel




Models 2025 and 2026
4" and 5" Speaker Wall Panel




Model 2006
Remote Speaker Wall Panel




Model 2020-B Hi Fidelity
Speaker Wall Panel (Inside)

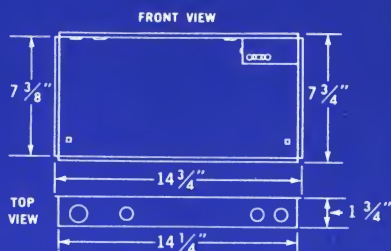

Model 2053 and 2054,
Master Station Housing




Model 2006
Remote
Speaker Housing




Models 2025 and 2026
4" and 5" Speaker Housing

Model 2414-A Rough-in Box for 2020-B
for outside installation

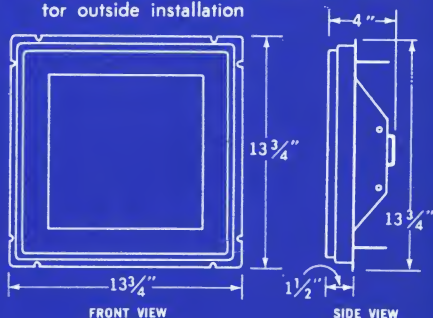

FRONT VIEW

SIDE VIEW

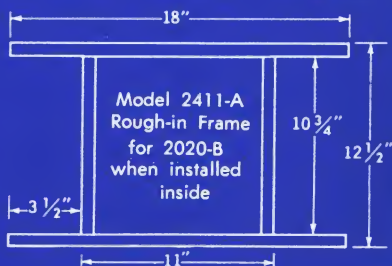

Model 2411-A
Rough-in Frame
for 2020-B
when installed
inside



Built-In Electric Barbecue with Rotisserie Models 4000 and 4020



- "Drops-in" to any standard cabinet.
 - Locks in position with tension braces.
 - Fully insulated.
 - Channel-Grids drain grease into removable tray.
 - All parts remove for easy cleaning.
 - Aluminum Mesh prevents scorch and flare-up.
 - Dual Heat-Elements . . . separately controlled.
 - Anodized Aluminum Front-Panel.
 - Brushed Chrome surface rim.
 - Rotisserie plugs right in. No cords.
 - Hinged Cover retains heat, saves electricity.
 - Operates on 220 volts, 3-wire service at 3200 watts.
 - 3-position Switch.
- List Price \$129.95






Rotisserie Attachment — Model 4020


- For Electric Barbecue Model 4000.
- Includes Motor, Cover, Skewer and Aluminum Grease Pan.
- List Price \$34.95

Serving Tray — Model 4023

- Heavy anodized aluminum — for serving barbecued foods.
- List Price \$7.95



Built-In Electric Barbecue with Rotisserie – Models 4000 and 4020

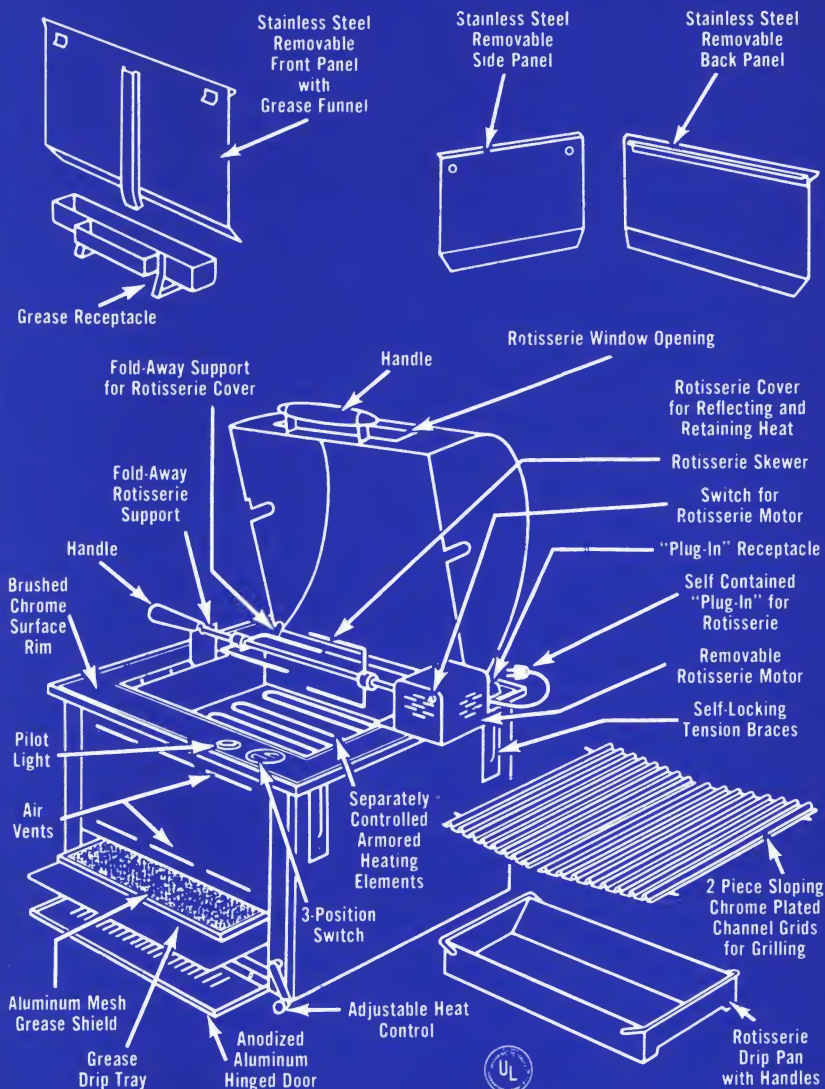

Cutout Dimensions for Counter Top Installation: 19 $\frac{1}{4}$ " wide, 19 $\frac{1}{4}$ " deep.
Rough-in Dimensions for Masonry Installation: 19 $\frac{1}{4}$ " wide, 19 $\frac{1}{4}$ " long, 14 $\frac{1}{4}$ " deep.



Built-In Charcoal Barbecue Model 4010





- Uses charcoal as the source of heat.
- Anodized Aluminum Front-Panel.
- Brushed Chrome surface rim.
- Sloping, 2-piece Channel Grids funnel grease into a removable tray.
- Fire-Box is warp-resistant, with divider and "fold-down" handles.
- Front-Panel air vents, for proper draft.
- Heat-Control Lever raises and lowers Fire-Box.
- All parts remove for easy cleaning.
- Model 4022 Insulation Box — List Price \$8.95
Use with Charcoal Barbecue Model 4010 when installed in cabinets
- Indoor installations must be vented according to local and national Building Codes.
- List Price \$59.95



Rough-in Dimensions for Masonry Installation: 16 $\frac{5}{8}$ " wide, 18 $\frac{3}{4}$ " long, 12 $\frac{1}{2}$ " deep.

Rough-in Dimensions using Model 4022 Insulation Box:
19 $\frac{3}{4}$ " wide, 19 $\frac{3}{8}$ " long, 12 $\frac{3}{4}$ " deep.

Built-In Charcoal Barbecue – Model 4010

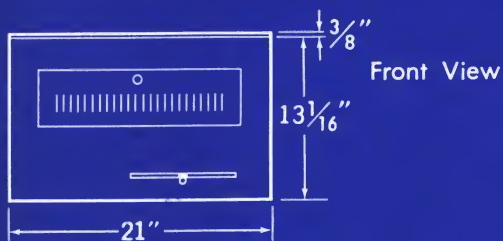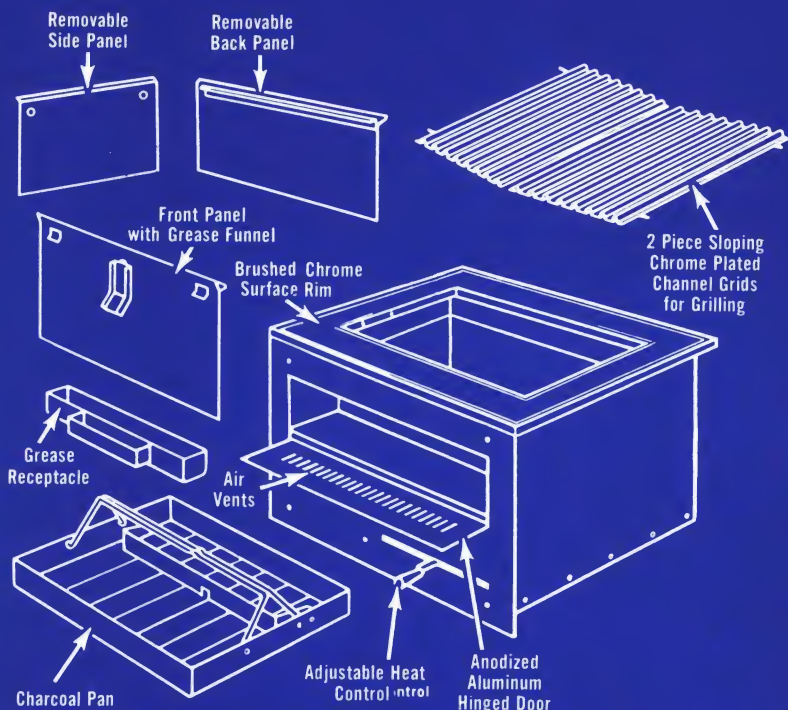

Specifications

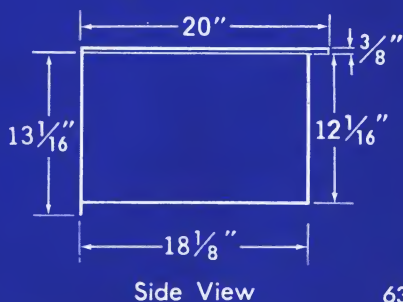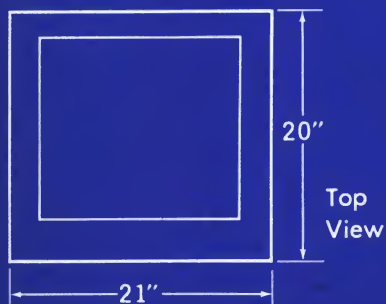



Built-In Food Center



Cut-away view of
Model 221 Power Unit
List Price \$45.50

- One Built-In, 6-speed Motor operates 6 lightweight appliances.
- Blender, Shredder-Slicer, Mixer, Grinder, Juicer, Knife-Sharpener fit on the counter-flush Turntable.
- No wasted space. No tangled cords. No heavy lifting.
- Stainless Steel Counter-Plate
- $\frac{1}{4}$ hp. Motor, 340 watts, 110-120 volts AC., 16000 R.P.M. idle.
- Low-speed drive, approx. 800 R.P.M. idle.
- Uses tap field, eliminating complicated centrifugal switches.
- Follow local Electrical Code for 3 amp. load.
- Motor must be grounded.
- Cut-out for housing $4\frac{3}{8}" \times 10\frac{3}{8}"$.



Mixer — Model 171
Motor-powered Bowl.
 $3\frac{1}{2}$ Quart size.
List Price \$19.95



Shredder-Slicer — Model 178
3 cutting plates.
List Price \$13.95



Sharpener — Model 174
Won't damage blade temper.
Flexible discs.
Safe and fast. List \$5.95



Blender — Model 172
Six Speeds.
Safety-sealed Blades.
List Price \$6.95



Grinder — Model 177
Exclusive vertical design.
Retains natural meat juices.
List Price \$24.95



Juicer — Model 173
Holds 10 full glasses.
Use with Mixer-Bowl and turntable. List Price \$3.95

Built-In Food Center



All vertical measurements are from Counter Top



Mixer

9" diameter,
7" high



Blender

4 $\frac{7}{8}$ " diameter,
9" high



Sharpener

3 $\frac{1}{8}$ " high

9 $\frac{1}{4}$ " diameter,
9 $\frac{5}{8}$ " high




Shredder




Grinder

11 $\frac{3}{8}$ " diameter,
11" high


Top View of Top Plate

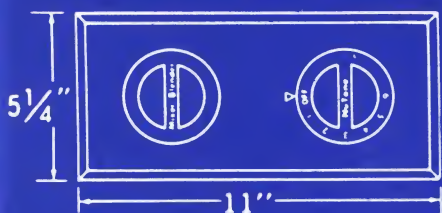


End View of Housing Assembly



Side View of Housing Assembly

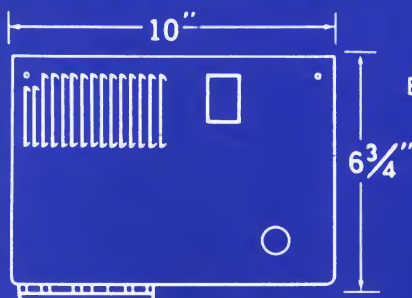


Bottom View of Housing Assembly

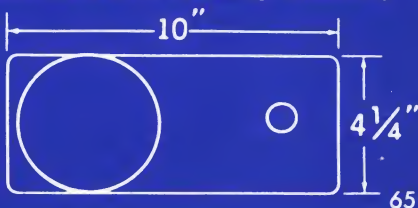



Heat-A-Vent Lite — Heater + Exhaust + Light Models 9090 and 9110

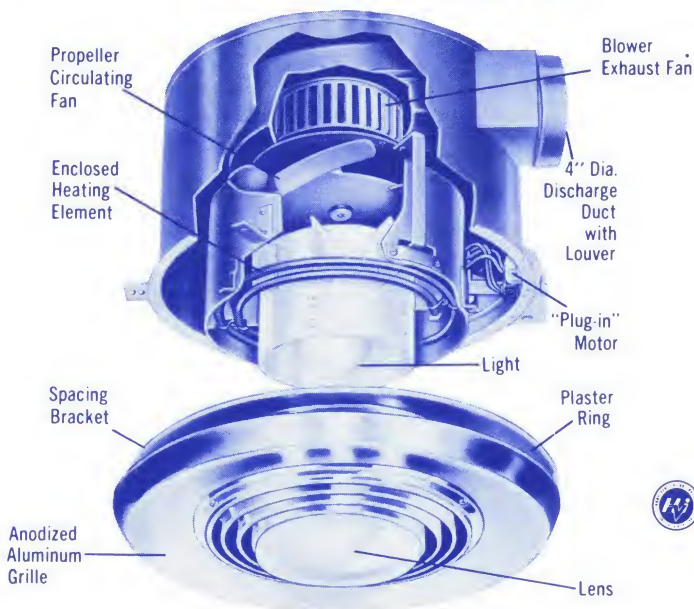

- The only Bathroom Fixture of its kind with 2 Blades! Propeller for circulating warm air — Blower Wheel exhausts odors and steam. Exhaust louver automatically closes when circulating fan for heater is moving.
- Concave grille and air diffuser made of cast aluminum.
- Enclosed Armored Heating Element for long life.
- Plaster ring hides rough edges of plaster or sheetrock.
- Spacing brackets insure correct air intake around grille.
- Plug-in "B" units for fast, easy installation.
- Thermal protected to prevent overheating.
- Units are wired for Switch use or Thermostat adaptation.
- Grille, 16" dia.; Housing 13½" dia. 7½" deep with ½" flange plus adjustable mounting brackets for 0" to ¾" plaster thickness. Uses 100 watt short neck light bulb.
- Extends only 3¼" from ceiling.
- Guarantee: 1 year on Product - 5 years on Motor.
- Has New Quiet Wall Switches (Ruby light indicates operation of heater).


Model No.	Watts	B.T.U.	Ventilator H.V.I. Certified in square feet			List Price
			Kitchen	Bath	Other	
9090	1475	5033	Not used	55	75	64.95
9110	1800	6142	Not used	55	75	69.95

Heat-A-Vent Lite — Heater + Exhaust + Light


Models 9090 and 9110



Typical Ducting Installation

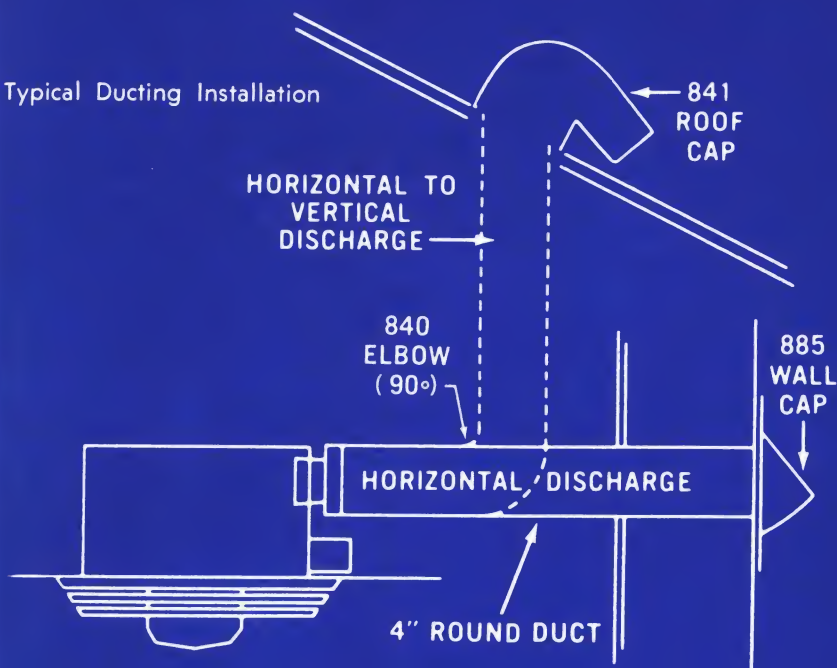


Typical Wiring Installation

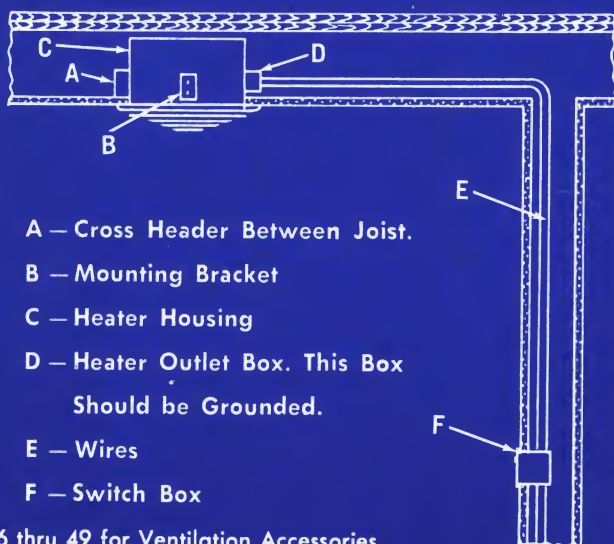

- A — Cross Header Between Joist.
- B — Mounting Bracket
- C — Heater Housing
- D — Heater Outlet Box. This Box Should be Grounded.
- E — Wires
- F — Switch Box



Heat-A-Lite – Heater + Light – Model 9010

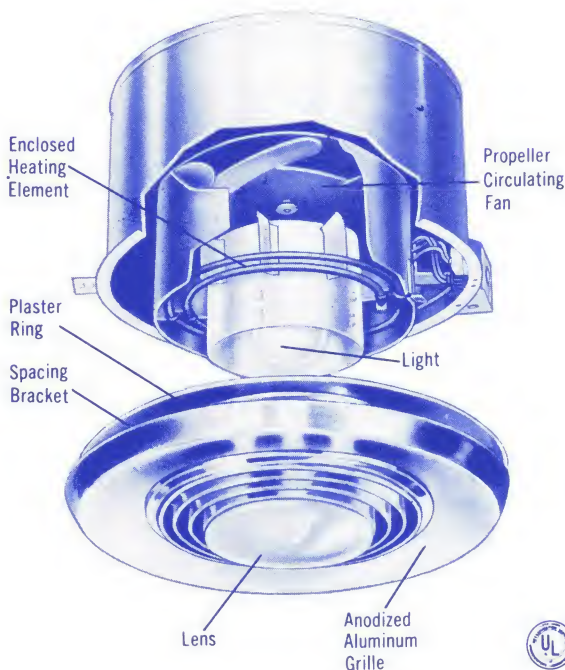


- Recirculates warm air usually wasted near ceiling.
- Extends only 3¼" from ceiling.
- Plaster ring hides edges of rough plaster or sheet rock.
- Spacing brackets insure correct air intake around grille.
- Plug-in "B" Unit for fast and easy installation.
- Thermal protected to prevent overheating.
- Anodized Aluminum Grille, 16" diameter, will not rust or tarnish. Housing 13½" dia. x 7½" deep with ½" flange plus adjustable mounting brackets for 0" to ¾" plaster thickness. Uses 100 watt short neck light bulb.
- Enclosed Armored Heating Element for long life.
- Guarantee: 1 year on product — 5 years on motor.

Model No.	Watts	B.T.U.	List Price
9010	1475	5033	49.95

NuTone Anodized Finishes will not rust, stain or tarnish

Typical Wiring Installation

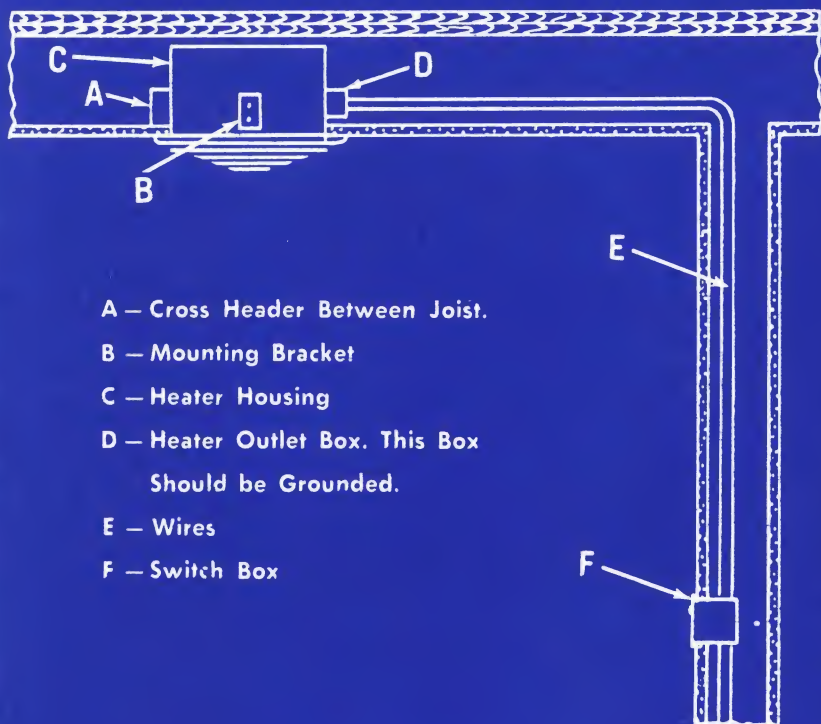

A — Cross Header Between Joist.

B — Mounting Bracket

C — Heater Housing

D — Heater Outlet Box. This Box
Should be Grounded.


E — Wires

F — Switch Box

See pages 46 thru 49 for Ventilation Accessories



Radiant Ceiling Heater + Exhaust Fan Model 9150

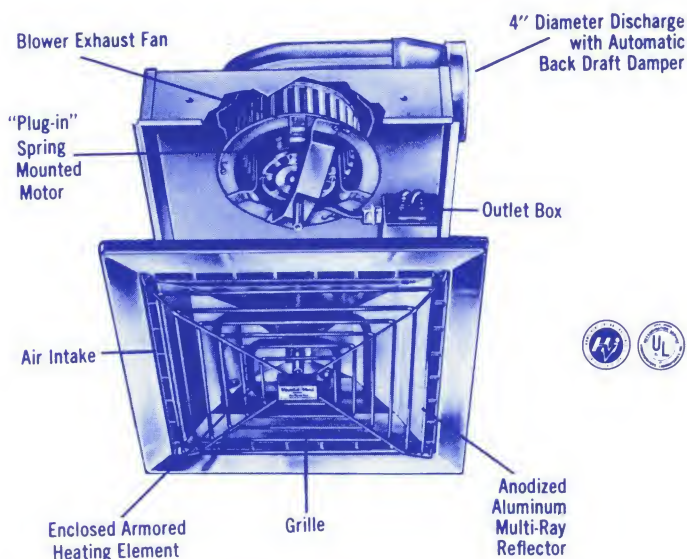


- Supplies quick infra-red heat all through bathroom.
- Heats and ventilates independently, or simultaneously.
- Trim, classic design — extends only 2¼" from ceiling.
- Highly polished anodized aluminum Multi-Ray reflector — for maximum wide-angle heating efficiency.
- Highly attractive grille — 14" square.
- Ultra quiet operation — with new spring-mounted motor.
- Two speed motor for ventilating and heating.
- Enclosed, armored heating element for long life.
- Connects to standard (60° C.) house wire.
- Pre-wired "whisper quiet" rocker-type switches and anodized aluminum switch plate included.
- Bath light may be connected to switch control for fan.
- May be connected to line type, double pole, Thermostat. (Thermostat is not furnished).
- Has automatic back-draft damper — and discharges through 4" round duct. Housing: 11½" sq., 6" deep.
- Adjustable mounting brackets — no blocking between joists. Plug-in motor and reflector assemblies.
- Guarantee: 1 year on Product, 5 years on Motor.

Model No.	Watts	B.T.U.	Ventilator H.V.I. Certified in square feet			List Price
			Kitchen	Bath	Other	
9150	1500	5118	Not used	75	100	49.95


Radiant Ceiling Heater + Exhaust Fan Model 9150



Typical Ducting Installation

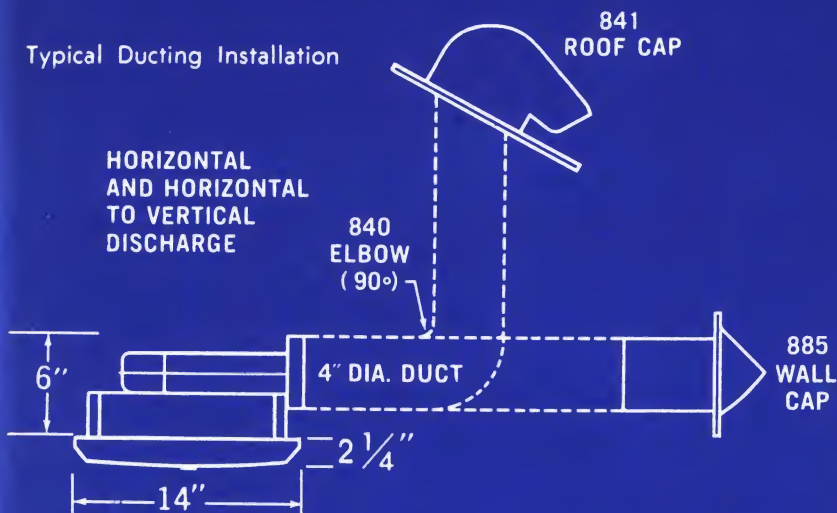


Typical Wiring Installation

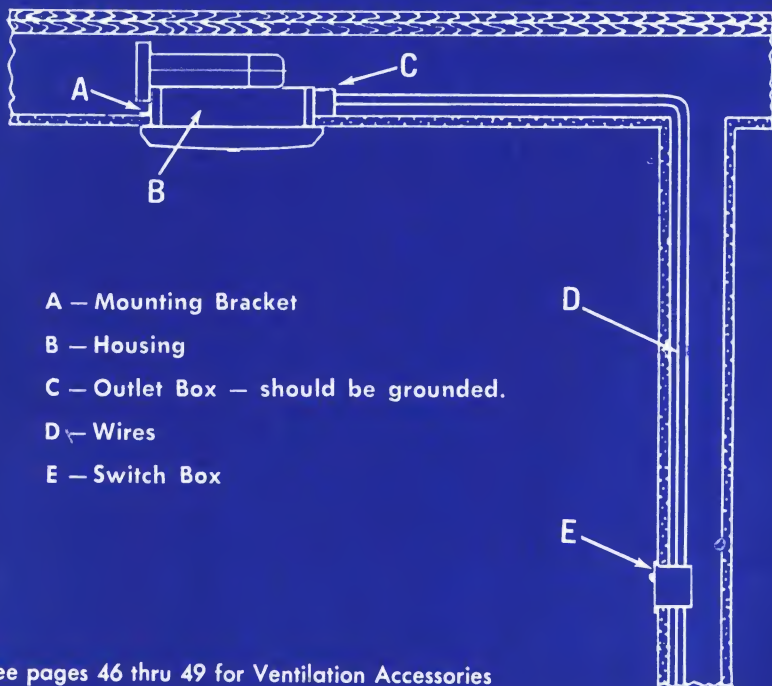

- A — Mounting Bracket
- B — Housing
- C — Outlet Box — should be grounded.
- D — Wires
- E — Switch Box



Built-In Radiant Ceiling Heater Model — 9200

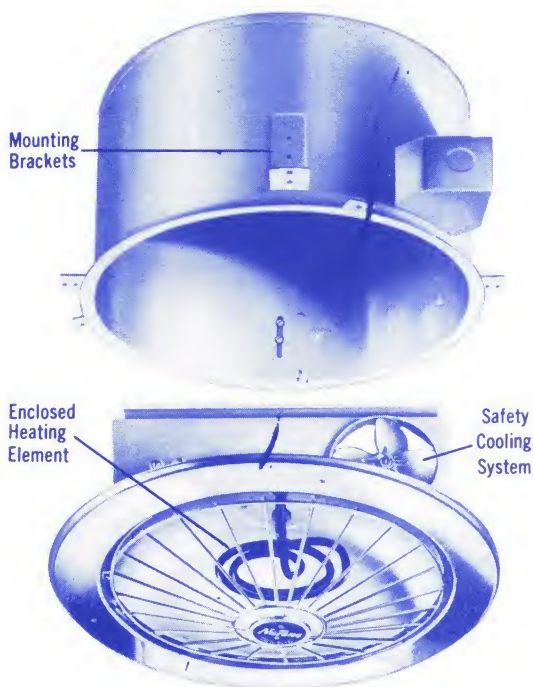


- Enclosed Armored Heating Elements for long life.
- Exclusive U. L. approved safety cooling system — prevents fire hazard.
- Healthful infra-red heat all through the bathroom.
- Special reflector "bounces" heat in all directions.
- No nearby scorches — no faraway shivers.
- Silver Anodized Aluminum Reflector will not rust or tarnish. Grille 16 $\frac{1}{4}$ " diameter.
- Housing 13 $\frac{1}{8}$ " dia. 7 $\frac{1}{2}$ " deep. Four adjustable mounting brackets for easy installation.
- Guaranteed for 1 year. U.S. Pat. No. 2,708,232.

Model No.	Watts	B.T.U.	List Price
9200	1000	3412	26.95

NuTone Anodized Finishes will not rust, stain or tarnish

Typical Wiring Installation

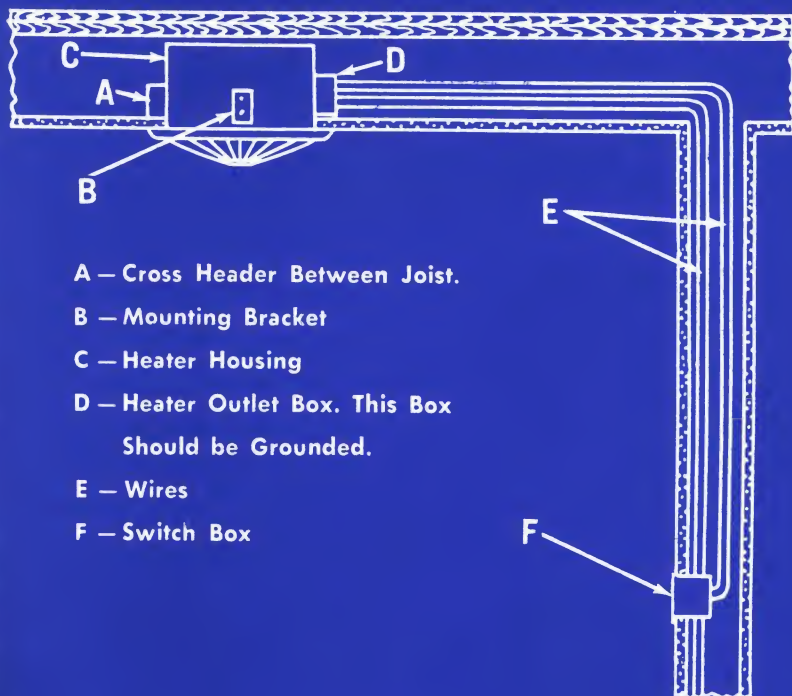

A — Cross Header Between Joist.

B — Mounting Bracket

C — Heater Housing


D — Heater Outlet Box. This Box
Should be Grounded.

E — Wires

F — Switch Box




Surface Mounted Radiant Ceiling Heater Model 9285

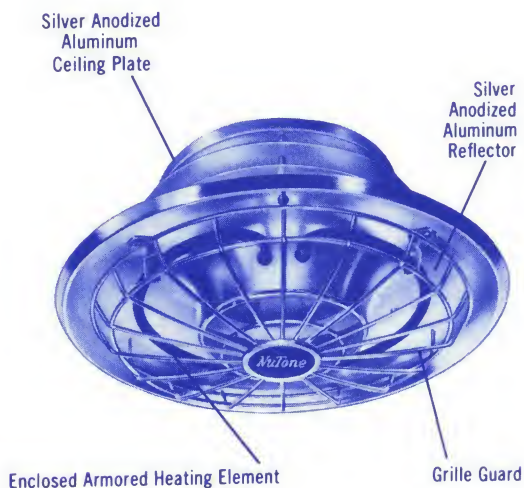


- New, highly attractive and functional shallow design.
- Heats 2 ways — with direct heat from element — and with reflected heat.
- Extends only 5½" from ceiling.
- Supplies quick infra-red heat all through the bathroom, not just the upper level.
- Completely silent — has no moving parts.
- Silver Anodized Aluminum Reflector and Ceiling Plate.
- Connects to standard (60° C.) house wire.
- Enclosed, armored heating element for long life.
- Mounts like a lighting fixture to standard junction box.
- Ideal for new home construction or remodeling.
- Reflector — 13" diameter. Ceiling Plate — 7" diameter.
- Guaranteed for 1 year.

Model No.	Watts	B.T.U.	List Price
9285	1000	3412	18.95

Surface Mounted Radiant Ceiling Heater
Model 9285

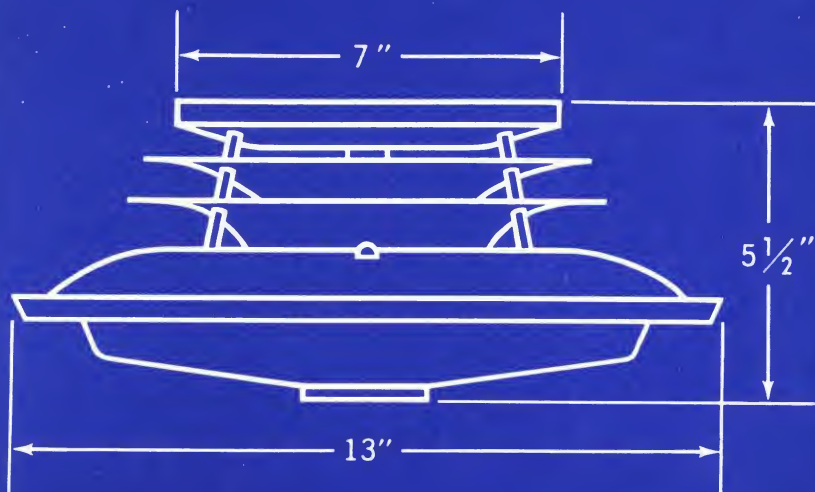


Typical Wiring Installation

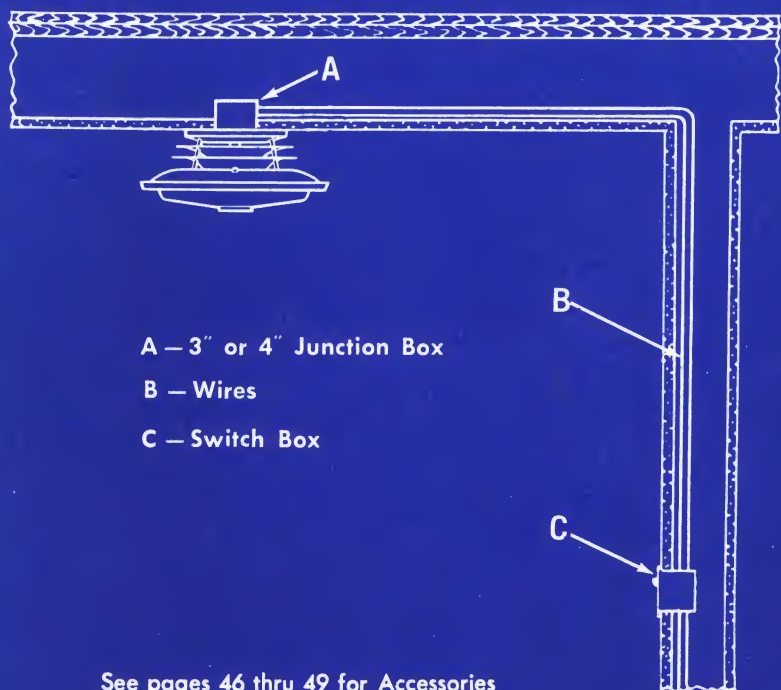

See pages 46 thru 49 for Accessories




Surface Mounted Radiant Ceiling Heater Model 9290

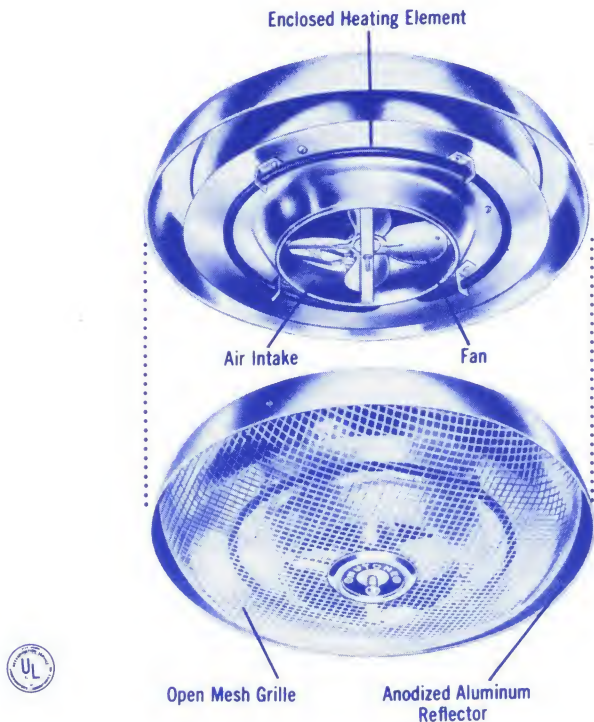


- Supplies infra-red heat all the way to the floor. Pulls air up through center of unit and disperses it around outer edge of grille. (Grille 15" diameter).
- Square perforated Anodized Aluminum Grille for maximum radiation and better diffusion of heat.
- Special armored heating element for long life.
- Connects to standard (60° C.) 14 gauge house wire.
- Mounts easily to standard 3" or 4" outlet box.
- Quiet motor with long-life bearings — heavy duty windings and high starting torque.
- Perma type lubrication for motor.
- Thermal protected to prevent overheating.
- Extends only 3½" from ceiling.
- Guaranteed for 1 year. U.S. Patents Pending.

Model No.	Watts	B.T.U.	List Price
9290	1250	4265	26.95

Surface Mounted Radiant Ceiling Heater
Model 9290

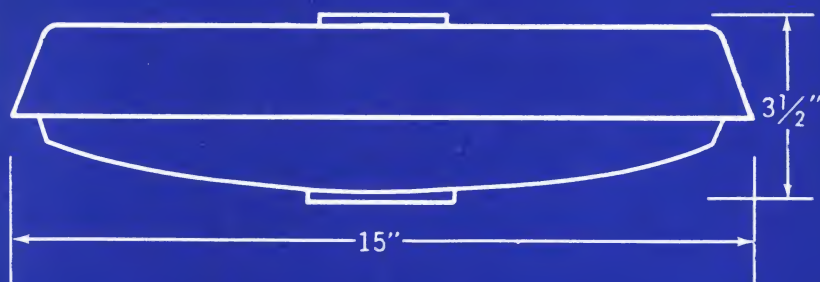

Typical Wiring Installation

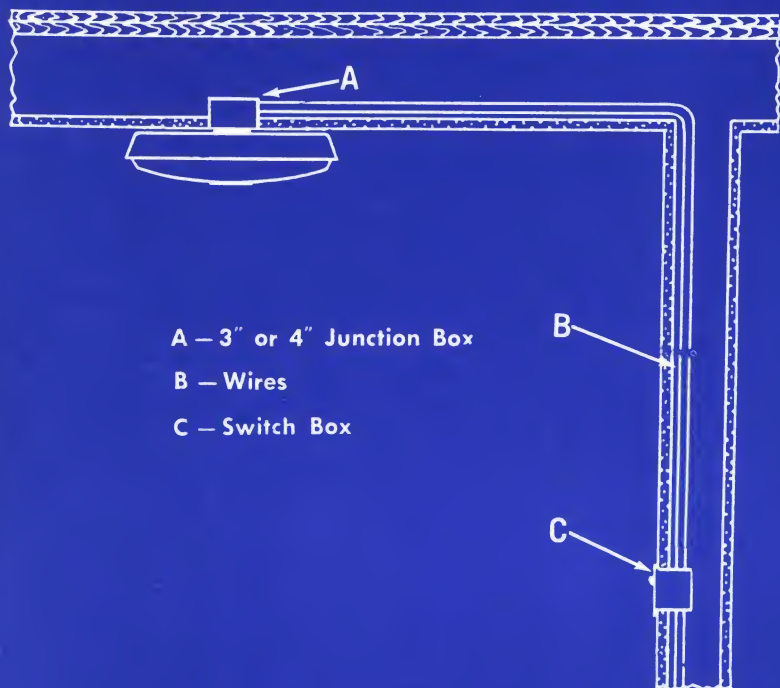


A — 3" or 4" Junction Box

B — Wires

C — Switch Box




Built-In Bulb Type Radiant Ceiling Heater Model 9400

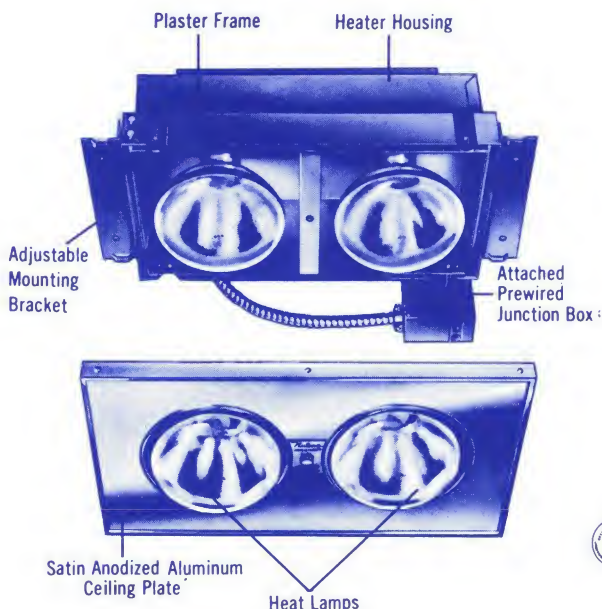


- Uses Infra-Red Heat Lamps.
- Installs parallel or at right angles between ceiling joists.
- Connects to standard (60° C.) 14 gauge house wire.
- Modular design — 2 heaters can be installed in large bathrooms.
- Satin Anodized Aluminum ceiling plate with polished borders.
- Unit is completely silent — has no moving parts.
- Mounting Brackets adjust for 0" to $\frac{3}{4}$ " plaster thickness.
- Attached pre-wired junction box with standard knockouts.
- Can also be mounted with two hanger bars included.
- Aluminized steel housing resists rust and corrosion.
- Housing can be lowered through plaster frame for easy access to junction box.
- Ideal for new home construction or remodeling.
- Use two 250 W. (R/40)* Infra-red heat lamps (not included). Lamps are rated 5,000 hours life.
- Housing is $7\frac{1}{2}$ " wide, $5\frac{3}{4}$ " high, 14" long.
- Ceiling plate is $8\frac{1}{2}$ " x $16\frac{1}{2}$ " x $\frac{3}{4}$ ".
- Guaranteed 1 year.

Model No.	Watts*	B.T.U.*	List Price
9400	500	1706	17.95

Built-In Bulb Type Radiant Ceiling Heater
Model 9400

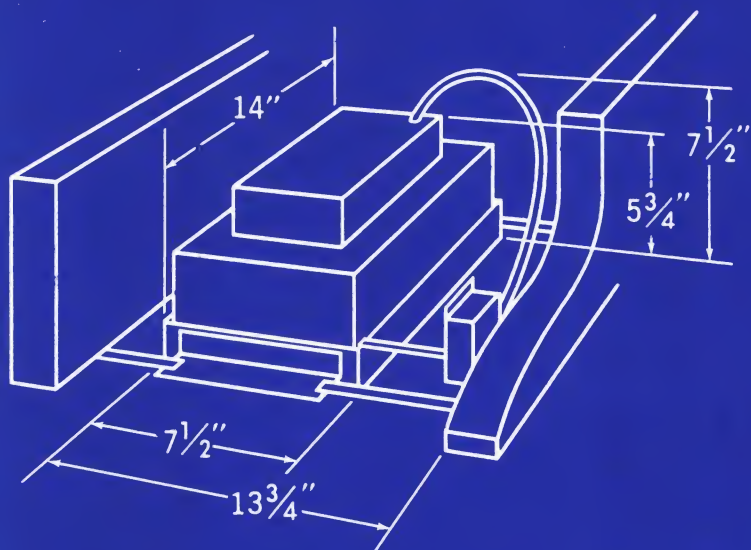


Typical Ceiling Installations

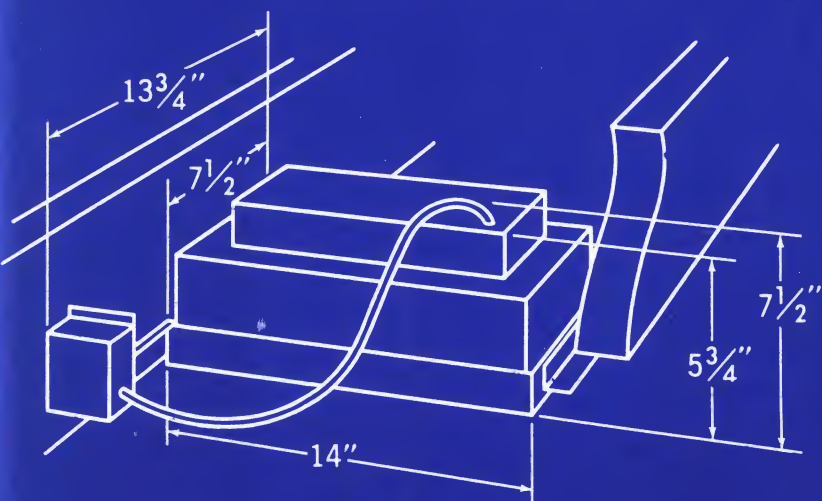



Radiant Wall Heater + Exhaust Fan Models 9300 and 9310

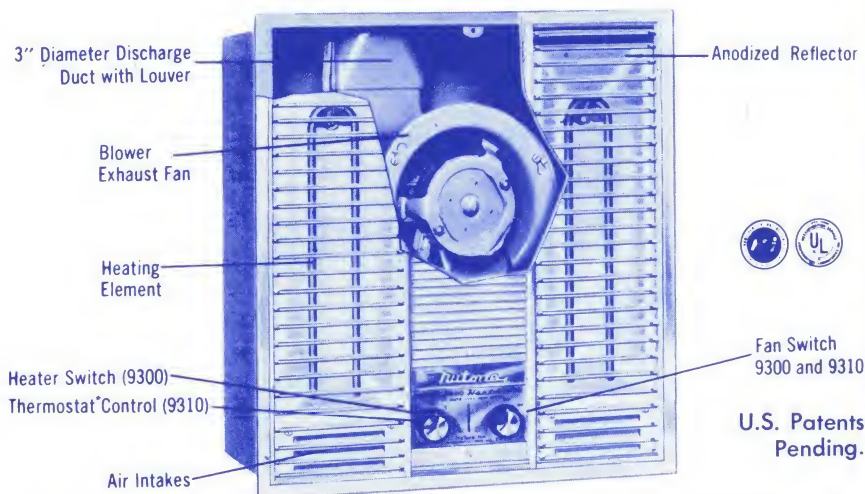

* Bi-metal Snap Action Type Thermostat. Snap action eliminates radio and television "buzzing" interference, and greatly prolongs thermostat life.

- Electric wall heat plus ventilation in one compact unit, — avoids double cutouts and double wiring.
- Cushion mounted motor with super quiet blower fan.
- Heater and fan operate at same time or separately.
- Two armored heating elements — use both for 5460 BTU or use single element for 2730 BTU.
- Special receptacle permits optional plug-in of fan motor so that light switch can also control fan.
- Plug-in connections for fan and heating elements.
- Connects to standard house wire. May be wired to 117 Volts or 234 Volts three wire service, 60 cycle AC.
- Satin Anodized Aluminum grille frame and reflectors.

Model 9310


Same as Model 9300 except that the thermostat controls the operation of the heating elements (5460 BTU). The thermostat (Double pole, Bimetal Snap Action* Type) has temperature range of 30° F. to 100° F.

Model 9300 and 9310 Specifications: Outside Grille Frame 16" wide, 18" high. Housing 14" wide, 16" high. Discharge duct, 3" diameter.


- Guarantee: 1 year on product — 5 years on motor.

Model No.	Watts	B.T.U. Two Elements	Ventilator H.V.I. Certified in square feet			List Price
			Kitchen	Bath	Other	
9300	1600	5460	Not used	55	75	56.95
9310*	1600	5460	Not used	55	75	62.95

Radiant Wall Heater + Exhaust Fan Models 9300 and 9310

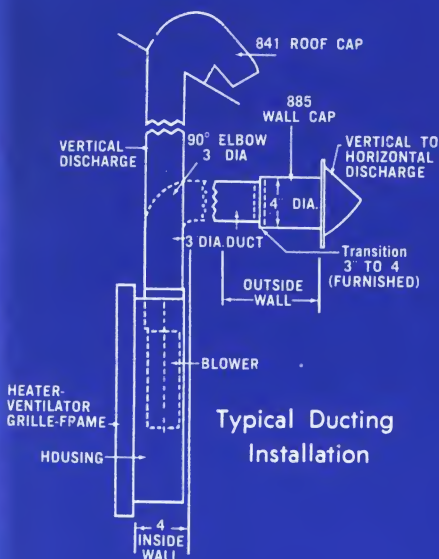


Typical Ducting
Installation

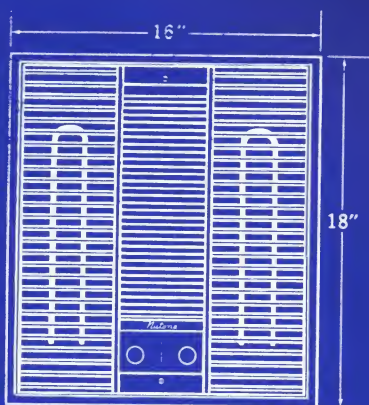


Front View of Grille Frame




Side View of
Grille Frame

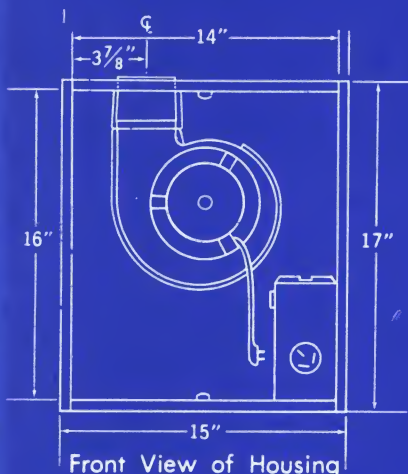

Front View of Housing

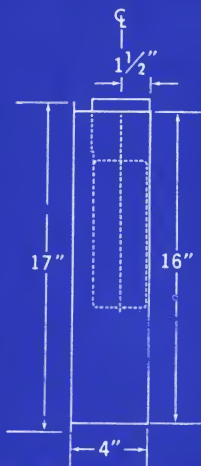

Side View of Housing

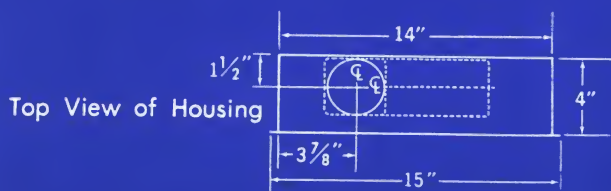


Top View of Housing

See pages
46 thru 49 for
Ventilation
Accessories



Built-In Radiant Wall Heater Models 9352 through 9358

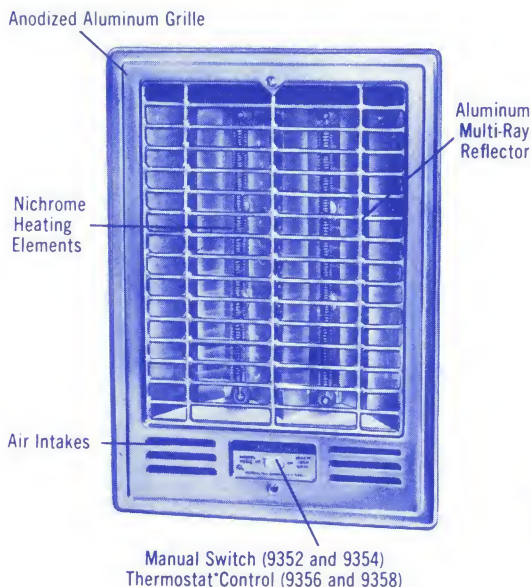

- Instant infra-red heat — throughout bathroom.
- Anodized Aluminum grille ($12\frac{1}{8}'' \times 18\frac{1}{8}''$).
- Highly polished Aluminum Multi-Ray reflector — for maximum wide-angle heating efficiency.
- Housing extends inward only $3\frac{1}{2}''$ in from plaster line.
- Connects to standard (60°C.) house wire.
- Manual control models have "whisper quiet", rocker type, on-off, switches.
- Automatic control models have highly efficient bimetal, snap action* type thermostat with positive "off", and temperature range of 30°F. to 100°F.
- Easy to install — adjustable mounting brackets — no blocking between joists.
- Housing: $10\frac{1}{8}'' \times 16'' \times 3\frac{1}{2}''$ deep.
- Long life Nichrome heating elements.
- Guaranteed 1 year.


Model No.	Control	Watts	B.T.U.	Volts	List Price
9352	Manual Switch	1200	4094	120	16.95
9354		1500	5118		
9356*	Automatic Thermostat	1200	4094	120	19.95
9358*		1500	5118		

Built-In Radiant Wall Heater
Models 9352 through 9358




Side View

Front View

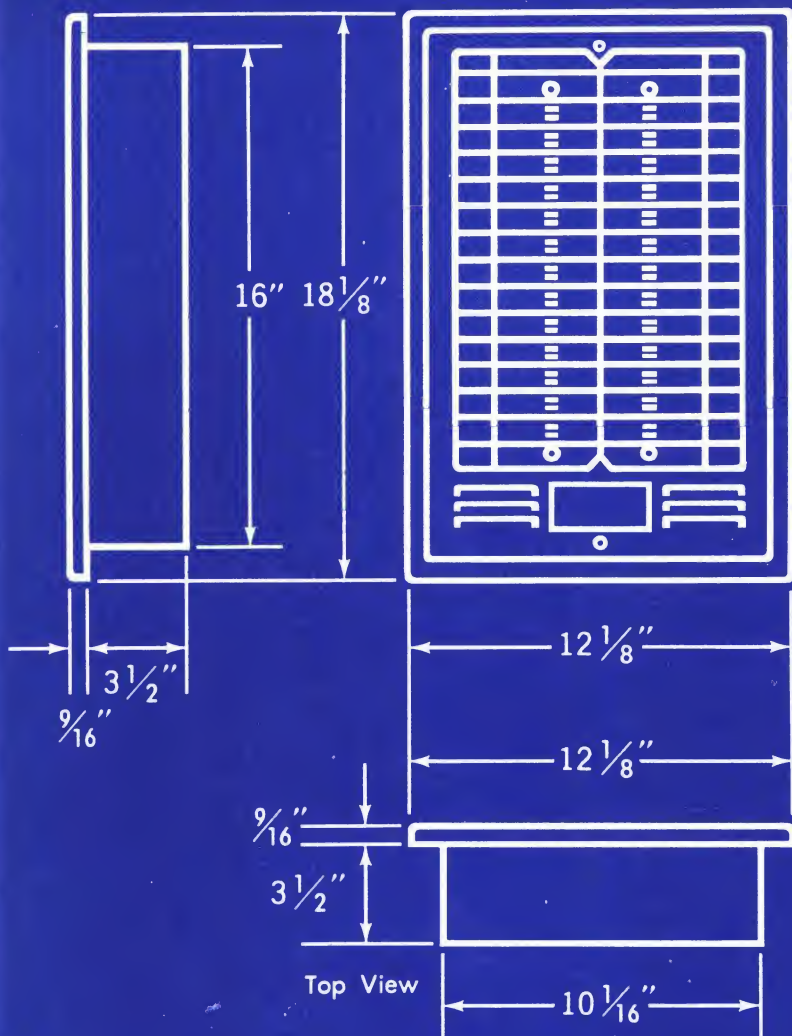





Surface Mounted Door Chimes



L-12—Plastic cover—Oyster White and Silver* or Ivory and Gold*. 2 notes front door, 1 note rear door. $7\frac{1}{2}'' \times 4\frac{5}{8}''$. \$4.95 List




L-16—Plastic cover—Oyster White and Silver* or Ivory and Gold*. 2 notes front door, 1 note rear door. $7'' \times 7\frac{7}{8}'' \times 2\frac{3}{4}''$. \$7.95 List




L-17—Desert Sand finish cover and brass grille. Two notes front door, one note rear door. $4\frac{7}{8}'' \times 7\frac{3}{4}'' \times 2\frac{7}{8}''$. \$6.95 List



L-20—Gold* Antique Hammered finish. Colonial design. 2 notes front door, one note rear door. $7'' \times 11\frac{3}{4}''$. \$10.95 List




L-21—Walnut and Gold Anodized* or Desert Sand and Gold Anodized*. Repeating Chime front door, 2 notes rear door, one note third door. $6\frac{3}{8}'' \times 7\frac{5}{8}'' \times 2\frac{5}{8}''$. \$9.95 List




L-22—Lime Oak or Walnut finish cover with Gold* tubes. Two notes front door, 1 note rear door. $7'' \times 9'' \times 3''$. \$9.95 List


Base Plate Dimensions

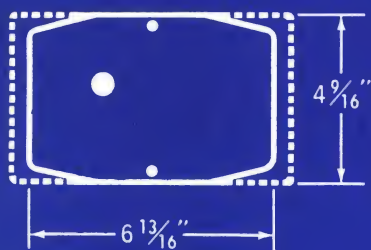


L-12

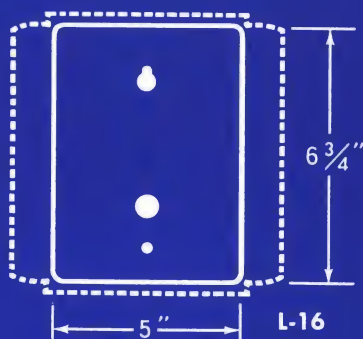


L-16

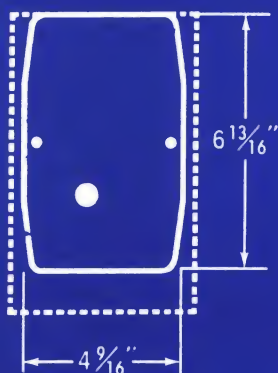


L-17

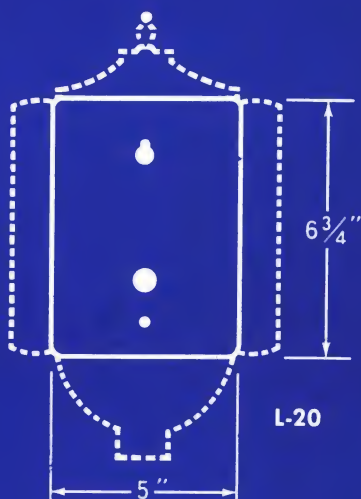

L-20

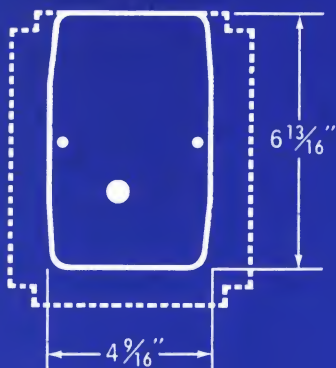

L-21

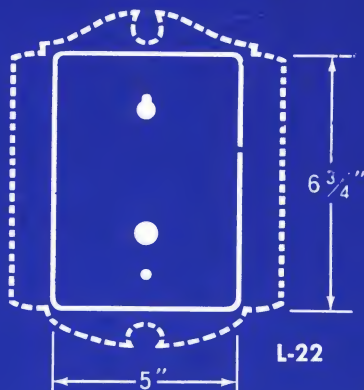

L-22



Surface Mounted Door Chimes



L-23—Lime Oak or Walnut finish cover with Gold* tubes. Two notes front door, 1 note rear. $7\frac{1}{2}" \times 11\frac{3}{4}" \times 3"$. \$8.95 List




L-32 — White or Walnut and Gold* cover. 2 notes chord tone front door, one note rear door. $8\frac{1}{4}" \times 10" \times 3\frac{1}{2}"$. \$15.95 List
Walnut finish cover \$14.95 List




L-39—Lime Oak or Walnut finish cover. 8 or 4 notes front door, one note rear door, different note third door. $11\frac{1}{2}" \times 7\frac{3}{4}" \times 3\frac{3}{4}"$ deep. Use NuTone 301 N Transformer. \$25.95 List


*NuTone
"Lifetime" Finish
will not
Rust or Tarnish.



L-31—Desert Sand finish cover. Gold flecked grille cloth. 2 notes chord tone front door, 1 note rear door. $7\frac{1}{2}" \times 9\frac{1}{8}" \times 2\frac{7}{8}"$. \$13.95 List

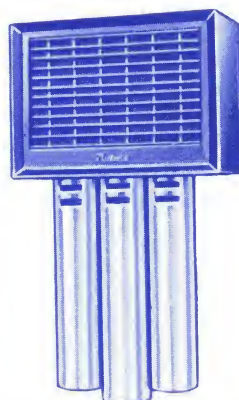


L-38 — Walnut or Desert Sand and Gold Anodized*. 8 or 4 notes front door, 1 note rear door, different note third door. $7\frac{3}{4}" \times 14\frac{1}{8}" \times 3\frac{1}{2}"$. Transformer included. \$34.95 List

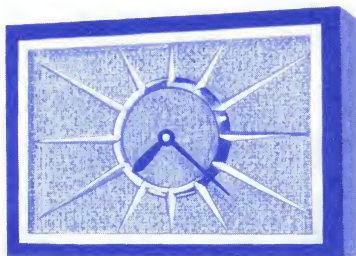


L-60—8 or 4 chord Chime and Clock. Light Walnut or Ebony finish. Brass sunburst and bezel. 1 chord rear door, different chord third door. Telechron Movement. Transformer included. $12\frac{1}{4}" \times 8\frac{3}{8}" \times 3\frac{1}{2}"$. \$74.95 List


Base Plate Dimensions
(and total length of chime with tubes)

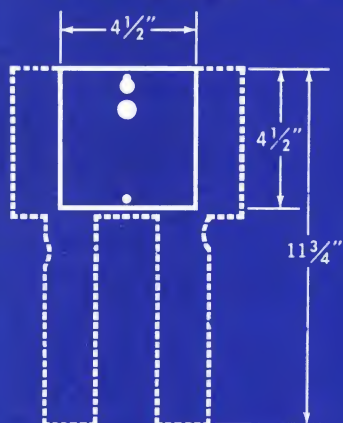


L-23

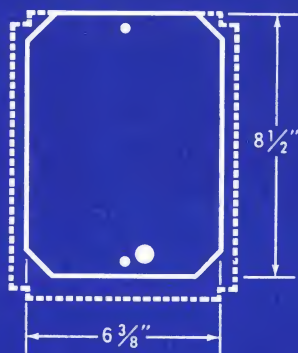


L-31

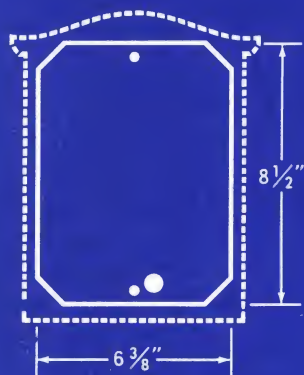


L-32

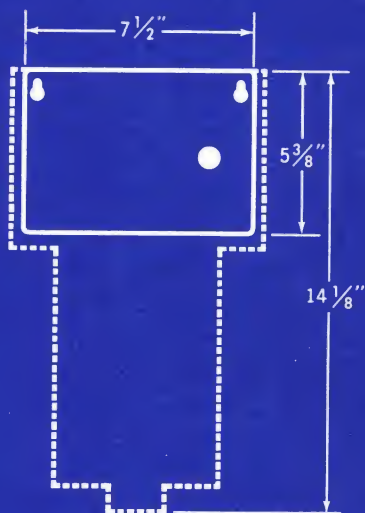

L-38

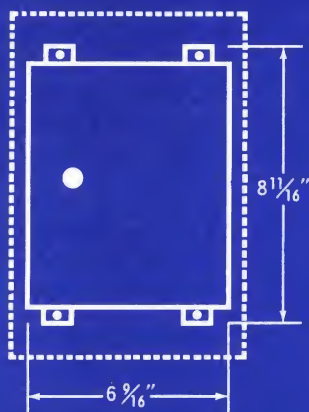

L-39

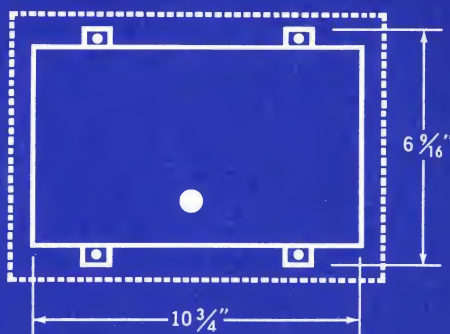


L-60



Built-In Clocks and Clock-Chimes

*NuTone "Lifetime" Finish will not Rust or Tarnish.



L-82B MODERN


Copper*, Gold*, or Silver*, black hour indicators. 8 $\frac{1}{8}$ " sq., $\frac{3}{8}$ " deep.

Modern Clock Chime

(L-82B plus L-80A) \$22.50

Modern Clock

(L-82B plus L-81A) \$15.50



L-83B PROVINCIAL

Walnut wood finish, gold numerals, gold anodized* grille. 8 $\frac{1}{8}$ " sq., $\frac{3}{8}$ " deep.

Provincial Clock-Chime

(L-83B plus L-80A) \$23.50

Provincial Clock

(L-83B plus L-81A) \$16.50



L-84B COLONIAL

Antique white with gold filigree, black numerals, gold anodized* grille. Walnut finish frame. 9" x 10" x $\frac{3}{4}$ "

Colonial Clock-Chime

(L-84B plus L-80A) \$24.50

Colonial Clock


(L-84B plus L-81A) \$17.50

Contain 16 Volt Telechron Clock movements—operate from 16 Volt chime transformer (NuTone 101-N). Adjustable mounting brackets. Pre-wired slip-on type connectors for clock motor connection. Knock-outs for thin wall conduit.

• Clock Chimes sound two notes chord tone for front door one note for rear.


CUTOUT DIMENSIONS Clock Chimes: 6 $\frac{1}{2}$ " sq. x 3 $\frac{1}{4}$ " Clocks: 6 $\frac{1}{2}$ " sq. x 2" deep

Built-In Door Chimes




L-15 Silver Anodized* and White or Gold Anodized* and Ivory. 2 notes front door, one note rear. 7 $\frac{1}{2}$ " square. Cutout 6 $\frac{1}{4}$ " square x 2" deep. \$9.95 List

L-14—Ivory finish cover. 2 notes front door, 1 note rear door. 5 $\frac{3}{4}$ " x 7 $\frac{1}{8}$ ". Cutout 4 $\frac{1}{2}$ " x 6 $\frac{1}{4}$ " x 1 $\frac{1}{4}$ " deep. \$5.95 List



Electronic Chimes


Connect with Stereo or Intercom Systems Have volume control. Electronic mechanism installed in cabinet or housing. Transformer included with each chime.



L-70 Surface Mounted

8 or 4 notes for front door, one note rear door, different note 3rd door. Walnut or Lime Oak finish cover — Gold Anodized Grille. 7 $\frac{3}{4}$ " x 11 $\frac{1}{4}$ " x 3 $\frac{3}{4}$ ".

List Price \$36.95



L-71 Built-In List \$16.95


2 notes front door, one note rear door. Gold* Anodized and Ivory. Grille 7 $\frac{3}{4}$ " sq. Cut-out 6 $\frac{1}{8}$ " sq.




L-72 Built-In

8 or 4 notes for the front door, 1 note for rear door, different note for 3rd door. Walnut finish frame, Gold* Anodized panel with control knobs. 9" wide, 10 $\frac{1}{4}$ " high. Cut-out 7 $\frac{1}{2}$ " wide, 9 $\frac{1}{8}$ " high. List Price \$42.95


Housing Dimensions

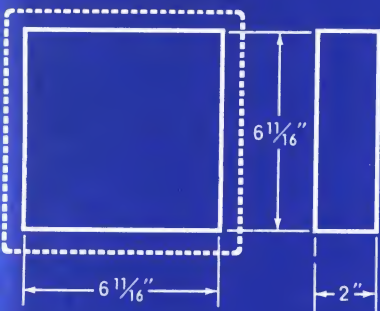


L-80A Housing
(with L-82B or L-83B)

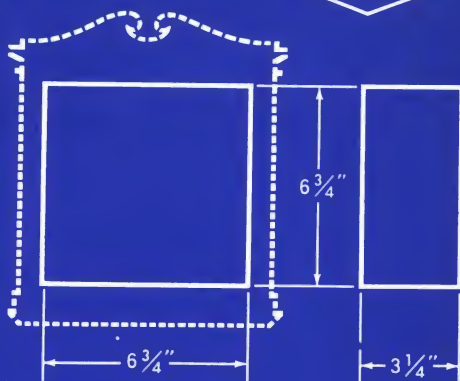


L-81A Housing
(with L-84B)




L-14

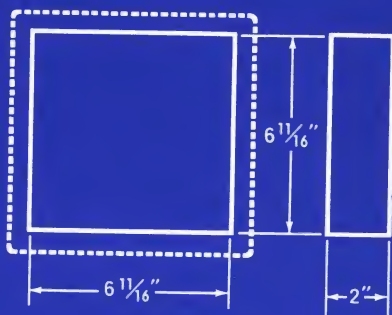

L-15 and L-71

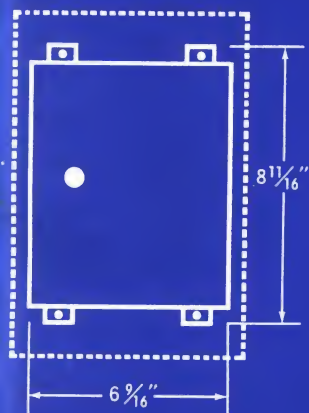


L-72 — Base Plate

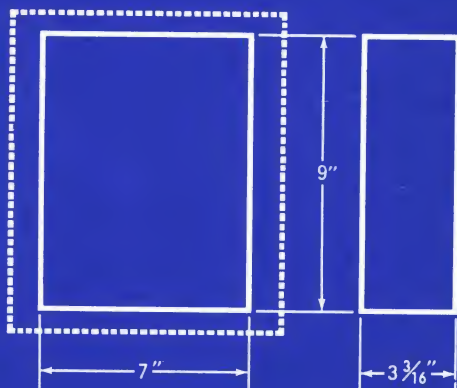

L-70




Long Tube Door Chimes



L-26




L-33



L-42



L-56



L-59

L-26—Ivory and Gold finish cover with satin brass tubes. 2 notes front door, one note rear door. 7" x 39 $\frac{3}{4}$ " long x 3" deep. \$11.95 List


L-33—Walnut or Lime Oak finish cover. Three satin brass tubes. 2 notes front door, one note rear. 8 $\frac{1}{2}$ " x 41 $\frac{3}{8}$ " long x 2 $\frac{1}{8}$ ". \$16.95 List

L-42—Lime Oak or Ebony finish, satin brass tubes. Selector switch for 8 or 4 notes for front door, 1 note rear, different note third door. Transformer included. 10 $\frac{3}{8}$ " x 5" x 48 $\frac{1}{2}$ ". \$49.95 List

New — Exclusive Printed Circuit — On all 4 and 8 Note Motor Model Chimes

L-56—Colonial wallclock and chime with Provincial Walnut wood finish cabinet. Selector switch for 8 or 4 notes for front door, 1 note rear, different note third door. Telechron Movement. Transformer included. 11" wide x 6" x 56 $\frac{1}{8}$ ". \$89.95 List


L-59—Wall Clock and chime. Light Walnut wood finish cover. Selector switch for 8 or 4 note front door, 1 note rear, different note third door. Telechron Movement. Transformer included. 9 $\frac{1}{8}$ " x 5 $\frac{1}{2}$ " x 51 $\frac{1}{2}$ " long. \$79.95 List



2 Note Mechanical Door Chimes

← MC-304


MC-309 with Optical Lens →




Gold* or Silver* Anodized nameplate with charcoal plastic push button outside. Oyster White or Walnut Finish cover inside. Fits all doors $\frac{3}{4}$ " to 3" thick. Chime cover 1 $\frac{1}{8}$ " x 3 $\frac{1}{8}$ " x 7 $\frac{1}{8}$ ". Nameplate $\frac{3}{4}$ " x 2 $\frac{1}{4}$ " x 3 $\frac{1}{4}$ ". \$4.95 List
With Extension Shaft, EX-311, fits door or walls to 9" thick. .50 List

Wide angle lens for clear view of entire doorway area. Gold* Anodized double window nameplate with charcoal plastic push button outside. Oyster White or Walnut finish cover inside. Chime cover: 1 $\frac{1}{4}$ " x 3 $\frac{1}{4}$ " x 7 $\frac{3}{8}$ ". Nameplate $\frac{3}{4}$ " x 2 $\frac{3}{4}$ " x 4 $\frac{1}{8}$ ". Fits all doors $\frac{3}{4}$ " to 2" thick. \$7.95 List


Base Plate Dimensions (and total length of chime with tubes)




L-26




L-33

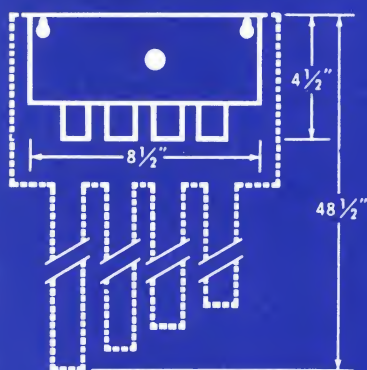

L-42

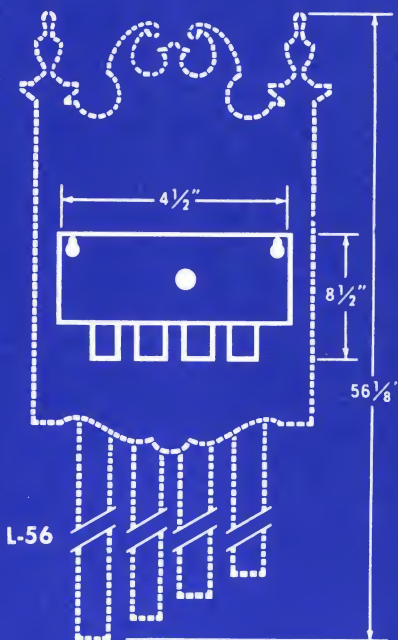


L-56

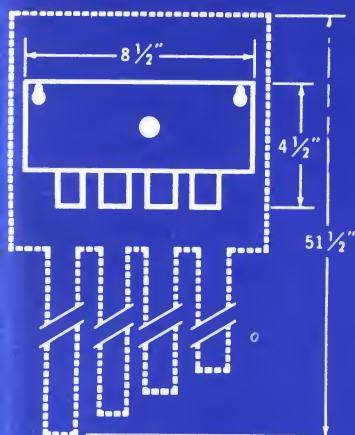


L-59

MC-309 →
Dimensions



MC-30.4 →
Dimensio...



Model Number	Name	Description	Size	List Price
PB-1	Round	Gold or Silver Anodized*	$\frac{5}{8}$ " dia.	.50
PB-3	Modern	Gold or Silver Anodized*	$3\frac{3}{8}$ " x $\frac{7}{8}$ "	1.25
PB-5	Concord	Gold*	5" x 2"	3.25
PB-6	Economy	Gold or Silver Anodized*	$2\frac{7}{8}$ " x $1\frac{3}{8}$ "	1.25
PB-11	Pacesetter	Gold Anodized*	$2\frac{3}{4}$ " x $\frac{3}{4}$ "	.65
PB-12	Project	Walnut and Ivory	$2\frac{3}{4}$ " x $\frac{3}{4}$ "	.42
PB-14	Classic	Gold Anodized*	$1\frac{7}{8}$ " dia.	1.25
PB-15	Kimberly	Bronze Anodized*	2" sq.	1.25
PB-16	Windsor	Antique Hammered Finish	$3\frac{7}{8}$ " x $1\frac{3}{8}$ "	1.58
PB-17	Star Bright	Gold or Silver Anodized*	$3\frac{1}{2}$ " x $2\frac{1}{4}$ "	2.50
PB-20	Mount Vernon	Gold Anodized*	3" x $1\frac{1}{8}$ "	1.25
PB-21	Gold Anodized*	4 contact button for Multiple Chime Hook-up	$2\frac{1}{2}$ " x $1\frac{3}{8}$ "	1.75

*NuTone "Lifetime" Finish will not Rust or Tarnish.



PB-1



PB-3



PB-5



PB-6




PB-11



PB-12



PB-14



PB-15



PB-16



PB-17



PB-20



PB-21

Pushbuttons — Lighted



Model Number	Name	Description	Size	List Price
PB-5L	Concave Light	Gold*. Electrically Lighted†	5" x 2"	3.95
PB-6L	Economy Lite	Gold or Silver Anodized*. Electrically Lighted†	2 7/8" x 1 1/8"	1.95
PB-8	Push Lite	Gold. Electrically Lighted†	3" x 1 1/2"	2.50
PB-10	Beacon Lite	Gold or Silver Anodized* and Black. Electrically Lighted†	2 3/8" x 7/8"	1.70
PB-14L	Classic Lite	Gold Anodized*. Electrically Lighted†	1 1/2" dia.	1.95
PB-15L	Kimberly Lite	Bronze Anodized*. Electrically Lighted†	2" sq.	1.95
PB-16L	Windsor Lite	Antique Hammered Finish. Electrically Lighted†	3 3/8" x 1 3/8"	2.35
PB-17L	Star Lite	Gold or Silver Anodized*. Electrically Lighted†	3 1/2" x 2 1/4"	3.25
PB-18	Round Lite	Gold or Silver Anodized*. Electrically Lighted†	5/8" dia.	1.25
PB-20L	Mount Vernon Lite	Gold Anodized*. Electrically Lighted†	3" x 1 3/8"	1.95


†For Use With 16 Volt Chimes.

*NuTone "Lifetime" Finish will not Rust or Tarnish.


PB-5L




PB-6L




PB-8




PB-10




PB-14L



PB-15L




PB-16L



PB-17L



PB-18



PB-20L





Transformers

*All NuTone transformers have a "Life-Time" Guarantee. Meet new U. L. requirements for 120 volt primary rating. Contain automatic resetting circuit breaker—protects against overload or short circuits—prevents ambient tripping and burn-outs. Have mounting feet for open wiring locations.

New Chime Transformers — Models 101-N and 515-N — Completely redesigned, inside and out

- New automatic resetting circuit breaker—protects against overload and short circuits—prevents ambient tripping and burn-outs.
- Meet new U. L. requirements for 120 volt primary rating.
- Exclusive "quick clamp" mounting feature—fits standard knock-out—for quick and positive mounting. U. S. Patent No. 2,819,331.
- Special layer-wrapped coil sections—guard against internal short circuits.
- Mounting feet for open wiring locations

Model Number and Description	Primary—120 V.		Size Height, Width, Depth	List Price
	Secondary Volts	Watts		
515N . . . 10 Volt, 5 VA, For chimes in small homes—and general purpose.	10	5	2½"x1⅞"x2"	\$2.75
101N . . . 16 Volt, 10 VA, Recommended for 2 Note Chimes—and general purpose.	16	10	2½"x1⅞"x2⅛"	\$3.35
301-N . . . 16 Volt, 30 VA, For oil and gas heating sys- tems, air conditioning units, multiple chime installations, signaling equipment, etc.	16	30	2¾"x2¼"x2½"	\$4.52
201-N . . . 24 Volt, 20 VA, For oil and gas heating sys- tems, air conditioning units, signaling equipment, etc.	24	20	2¾"x2¼"x2½"	\$4.24
320-N . . . 8-16-24 Volt — Tri-Volt. For general purpose use.	8 16 24	20	2¾"x2¼"x2½"	\$5.08


Transformers




515N




101N



201-N



301-N



320-N



Prices Higher Outside Continental United States
Prices subject to change without notice

NuTone Chimes and Transformers are Manufactured under one or more of following U. S. Patents: 2,293,671; 2,330,430; D-140,439; 2,408,712; 2,446,640; 2,542,947; 2,559,334; 2,659,074; 2,665,544; 2,386,738; D-180,189; D-180,406; D-180,518; 2,799,016; 2,810,123; 2,819,331. Other Patents Pending

NuTone, Inc. • Madison and Red Bank • Cincinnati 27, Ohio

SPECIFICATION REFERENCE BOOK



HOOD-FANS

DOOR CHIMES

EXHAUST FANS

FOOD CENTER

INTERCOM-RADIO

BUILT-IN STEREO

ELECTRIC HEATERS

BUILT-IN BARBECUE

NUTONE INCORPORATED · CINCINNATI 27, OHIO

Digitized by:



ASSOCIATION
FOR
PRESERVATION
TECHNOLOGY,
INTERNATIONAL
www.apti.org

BUILDING
TECHNOLOGY
HERITAGE
LIBRARY

<https://archive.org/details/buildingtechnologyheritagelibrary>

From the collection of:

Association for Preservation Technology, Int.

INTERCOM-RADIO

BUILT-IN STEREO

ELECTRIC HEATERS

BUILT-IN BARBECUE